



US007492153B2

(12) **United States Patent**
Brau et al.

(10) **Patent No.:** **US 7,492,153 B2**
(45) **Date of Patent:** **Feb. 17, 2009**

(54) **SYSTEM AND METHOD OF PARALLEL IMAGING WITH CALIBRATION TO A SEPARATE COIL**

5,600,244 A * 2/1997 Jensen et al. 324/309
6,289,232 B1 9/2001 Jakob et al.
6,841,998 B1 1/2005 Griswold
7,197,353 B2 * 3/2007 King et al. 600/410

(75) Inventors: **Anja C. S. Brau**, Menlo Park, CA (US);
Philip James Beatty, Menlo Park, CA (US);
Dwight G. Nishimura, Palo Alto, CA (US)

OTHER PUBLICATIONS

K.P. Pruessmann et al., "Sense: Sensitivity Encoding for Fast MRI," MRM 42:952-962, 1999.
M.A. Griswold et al., "Generalized Autocalibrating Partially Parallel Acquisitions (GRAPPA)," MRM 47:1202-1210, 2002.
M.A. Griswold et al., "Field-of-View Limitations in Parallel Imaging," MRM 52:1118-1126, 2004.
R.M. Heidemann et al., "VD-Auto-Smash Imaging," MRM 45:1066-1074, 2001.
A.C. Brau et al., "Efficient Computation of Autocalibrating Parallel Imaging Reconstructions," ISMRM 2006.

(73) Assignees: **General Electric Company**, Schenectady, NY (US); **Board of Trustees of the Leland Stanford, Jr. University**, Palo Alto, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

* cited by examiner

(21) Appl. No.: **11/757,571**

Primary Examiner—Louis M Arana
(74) *Attorney, Agent, or Firm*—Ziolkowski Patent Solutions Group, SC

(22) Filed: **Jun. 4, 2007**

(65) **Prior Publication Data**

US 2008/0297152 A1 Dec. 4, 2008

(57) **ABSTRACT**

(51) **Int. Cl.**
G01V 3/00 (2006.01)

An RF coil assembly includes a plurality of RF source coils and an RF target coil separate from the plurality of RF source coils. A computer is programmed to acquire MR data of an imaging object from each of the plurality of RF source coils and to acquire MR data of the imaging object from the RF target coil. The computer is further programmed to calculate a set of weights based on a relationship between MR data acquired from each RF source coil and MR data acquired from the RF target coil and to reconstruct an image based on an application of the set of weights to at least a portion of the MR data acquired from each of the plurality of RF source coils.

(52) **U.S. Cl.** **324/309; 324/307**

(58) **Field of Classification Search** 324/309, 324/307, 306, 318, 322


See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,587,656 A * 12/1996 Van Heels-Bergen et al. 324/307

27 Claims, 6 Drawing Sheets

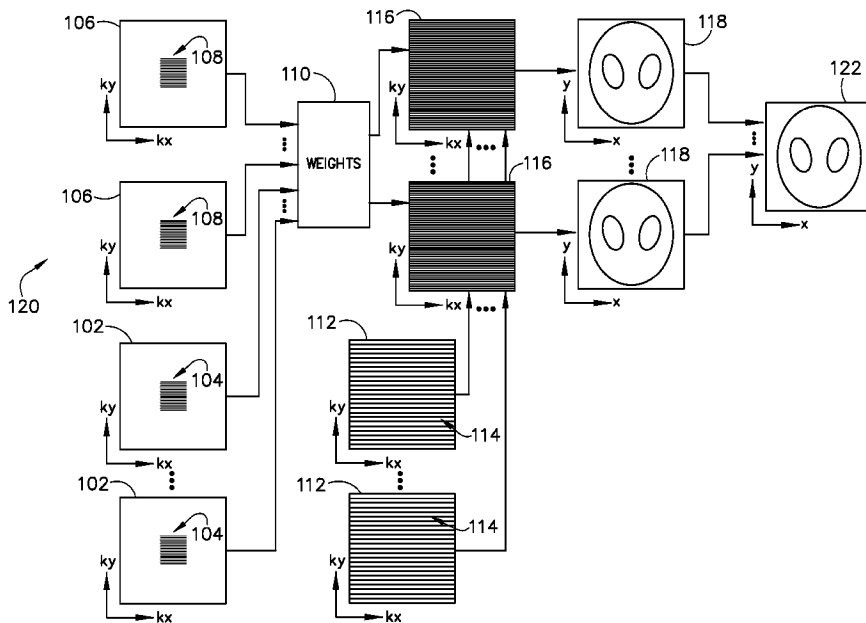

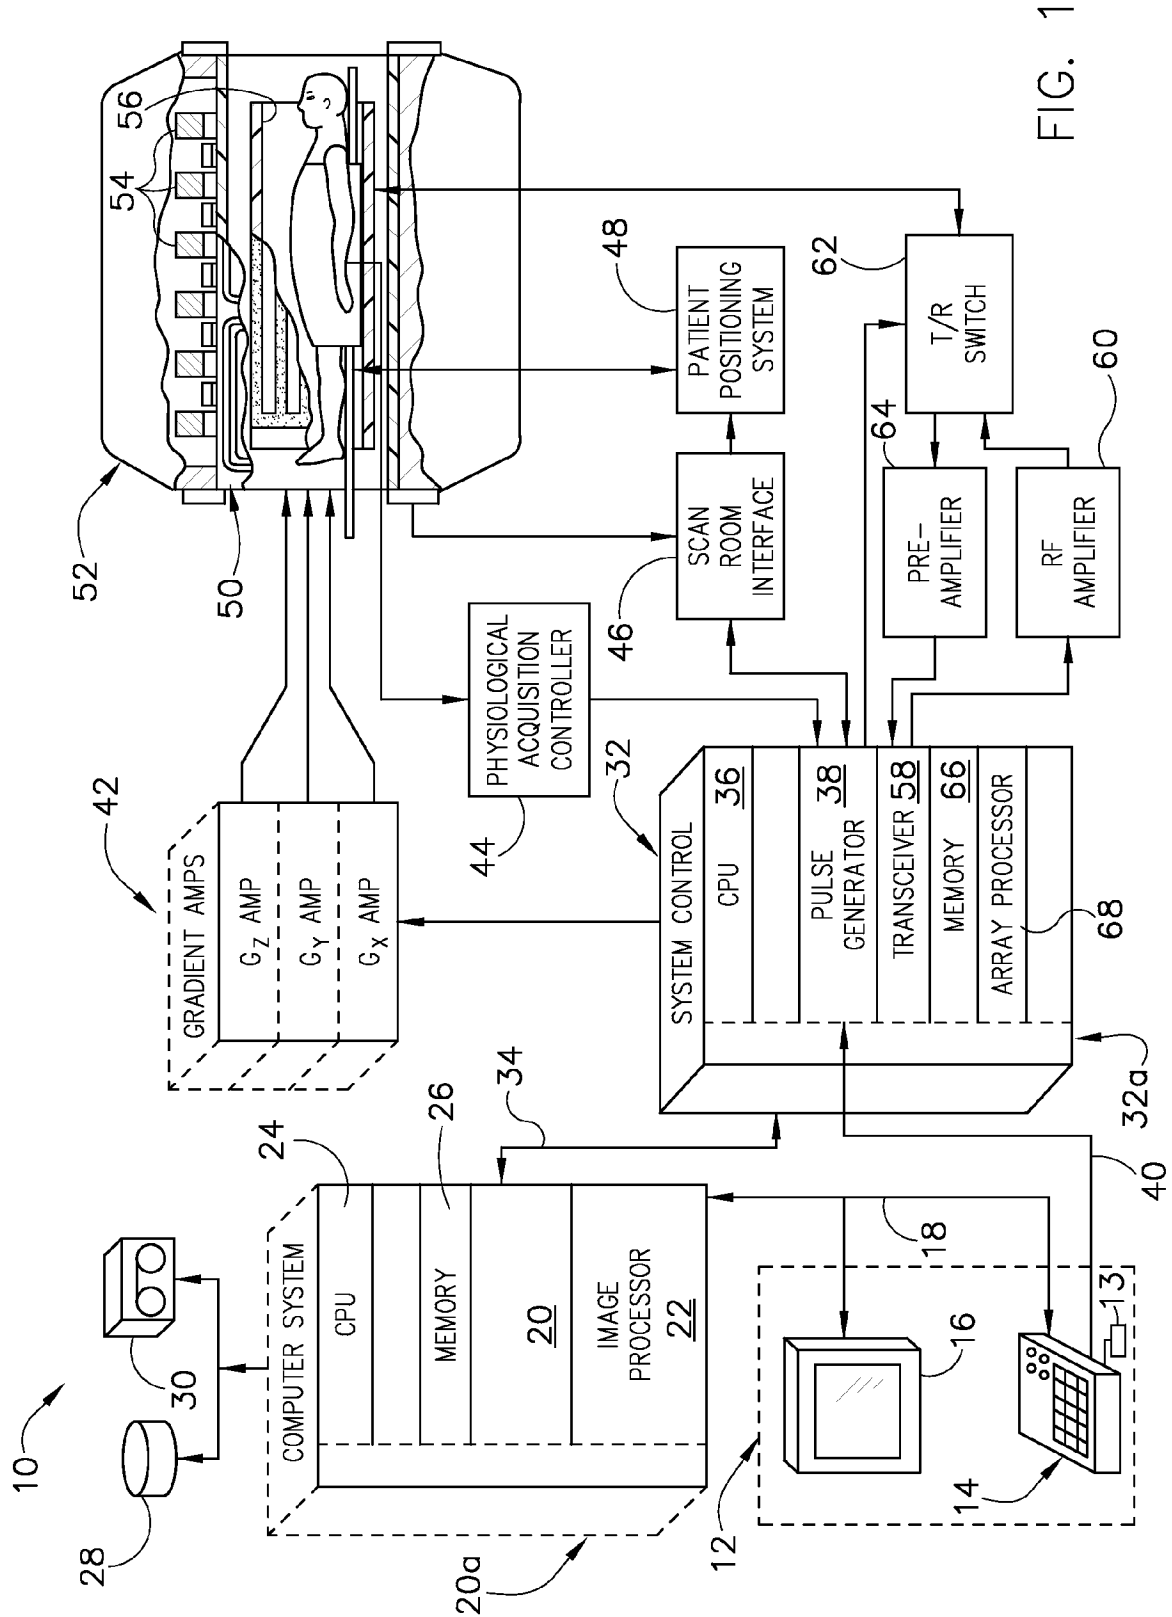
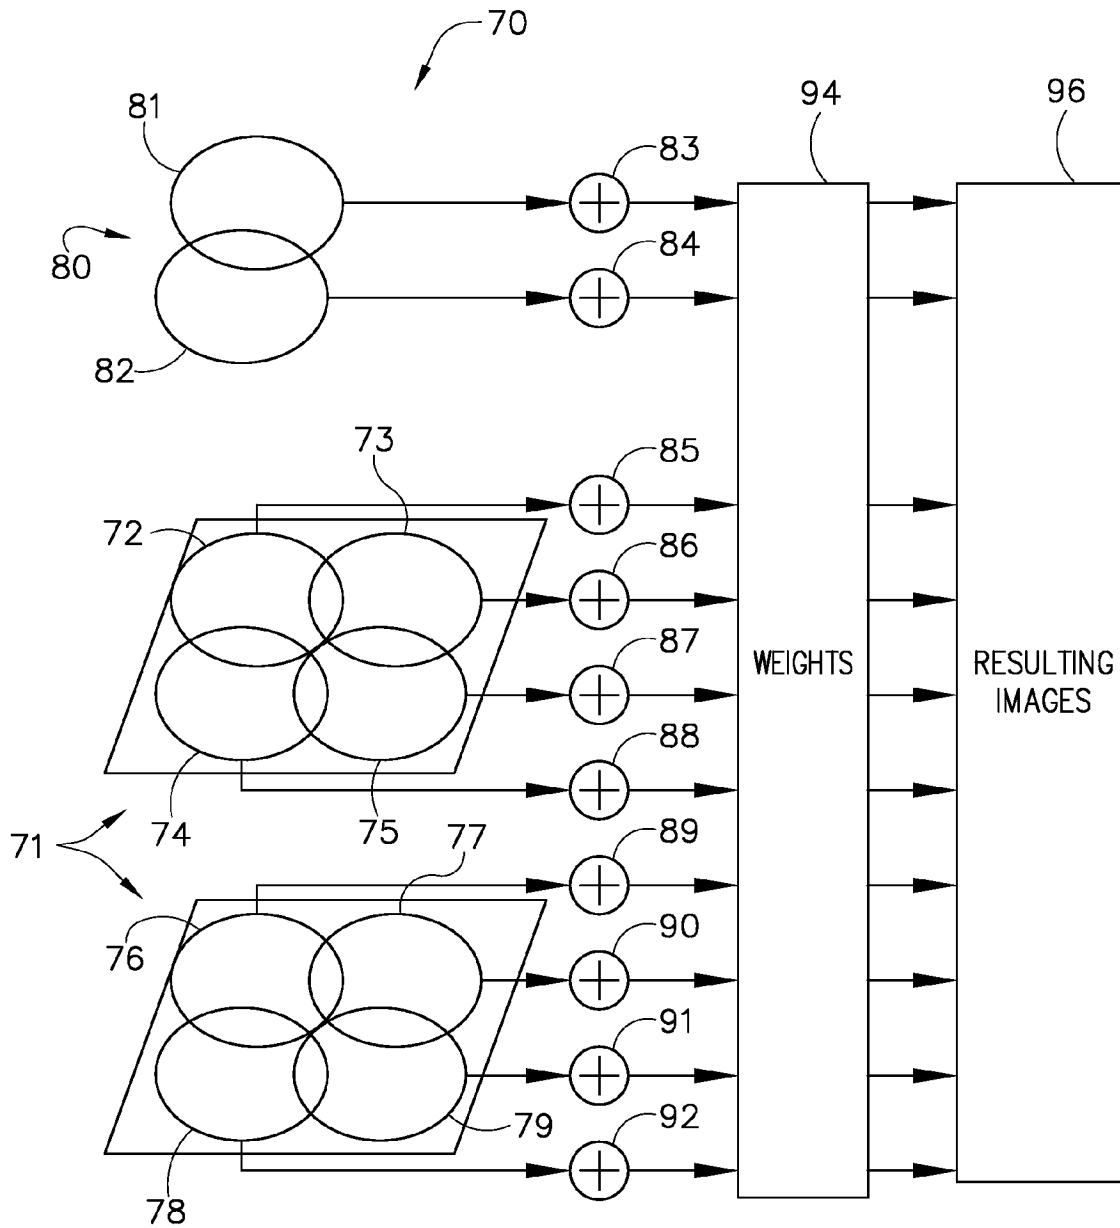


FIG. 1

FIG. 2



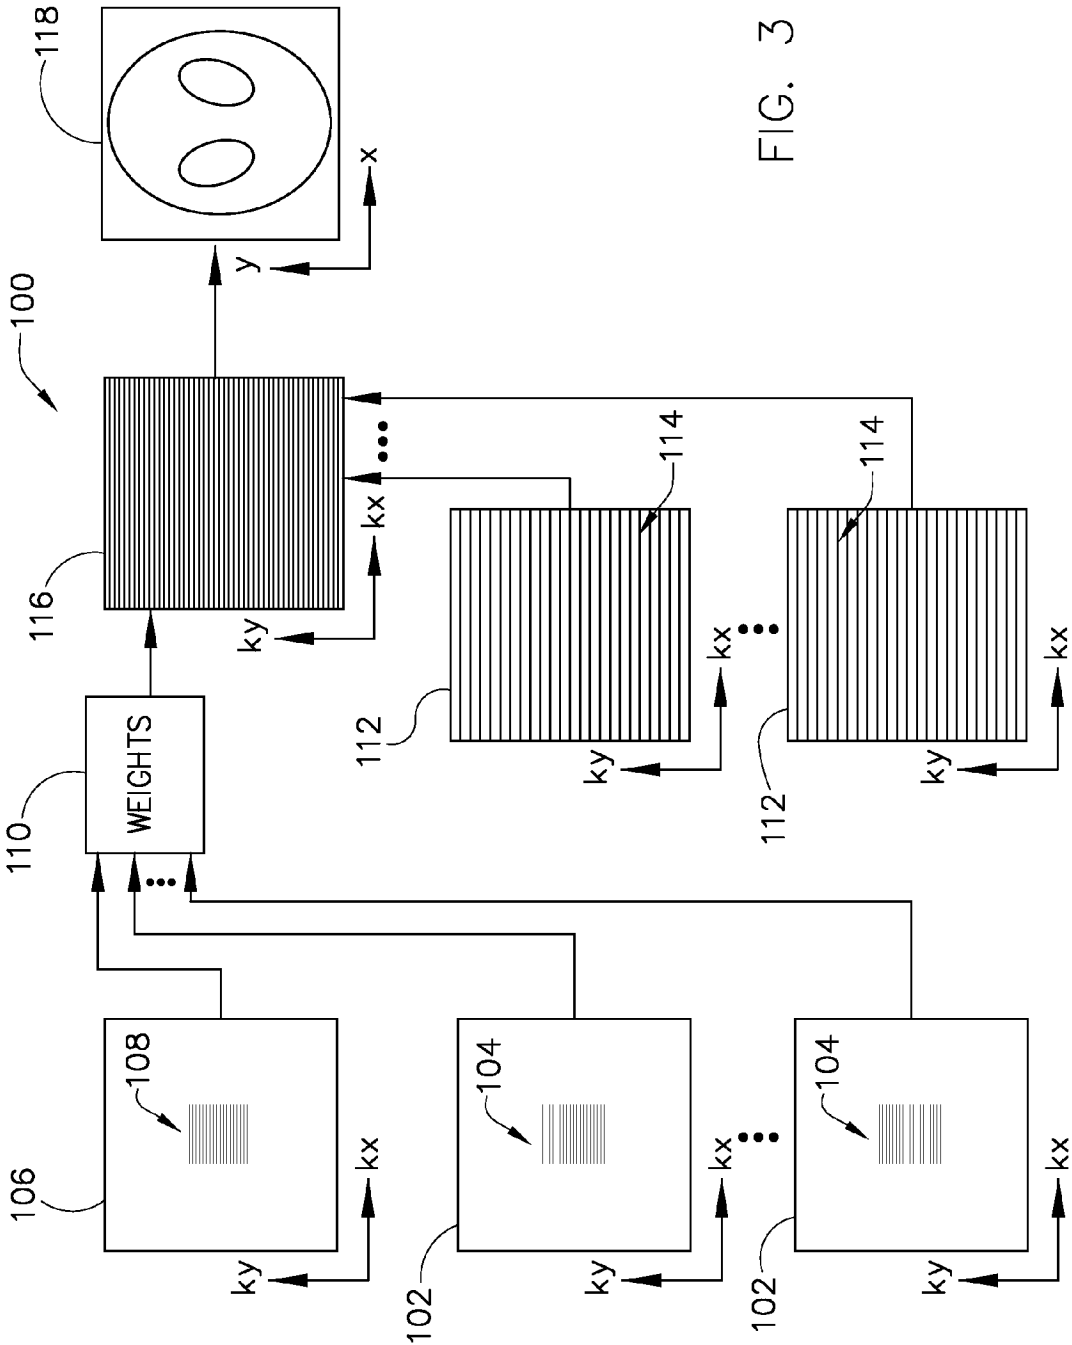


FIG. 3

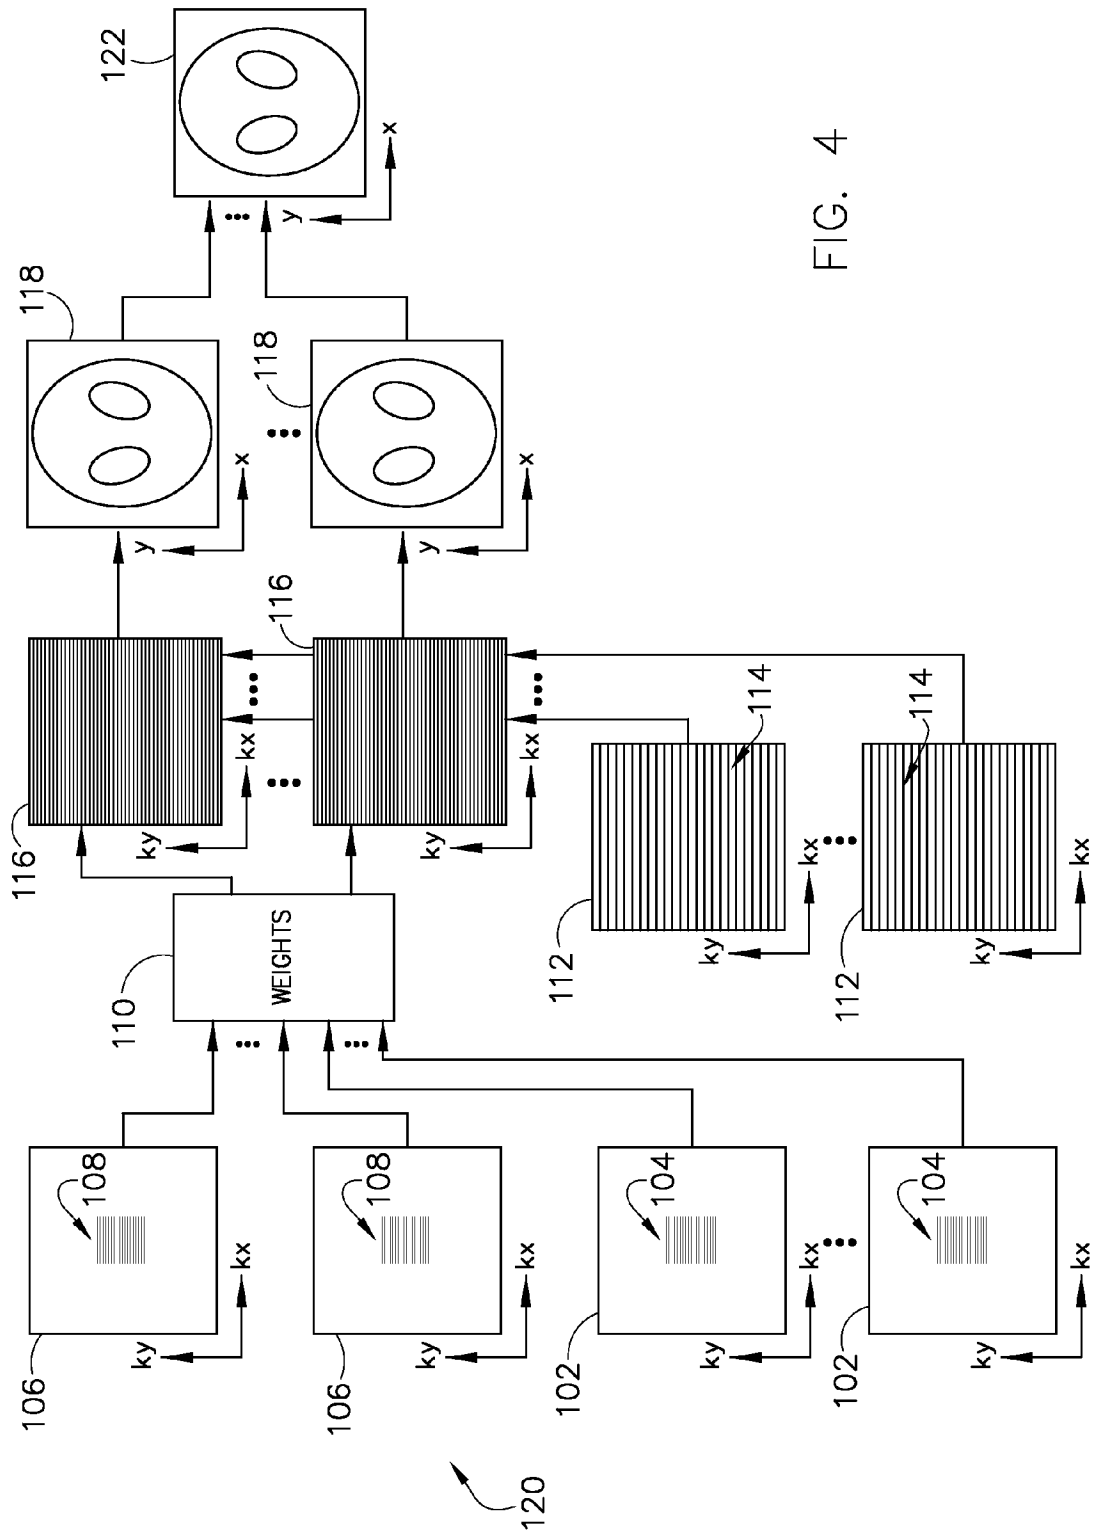


FIG. 4

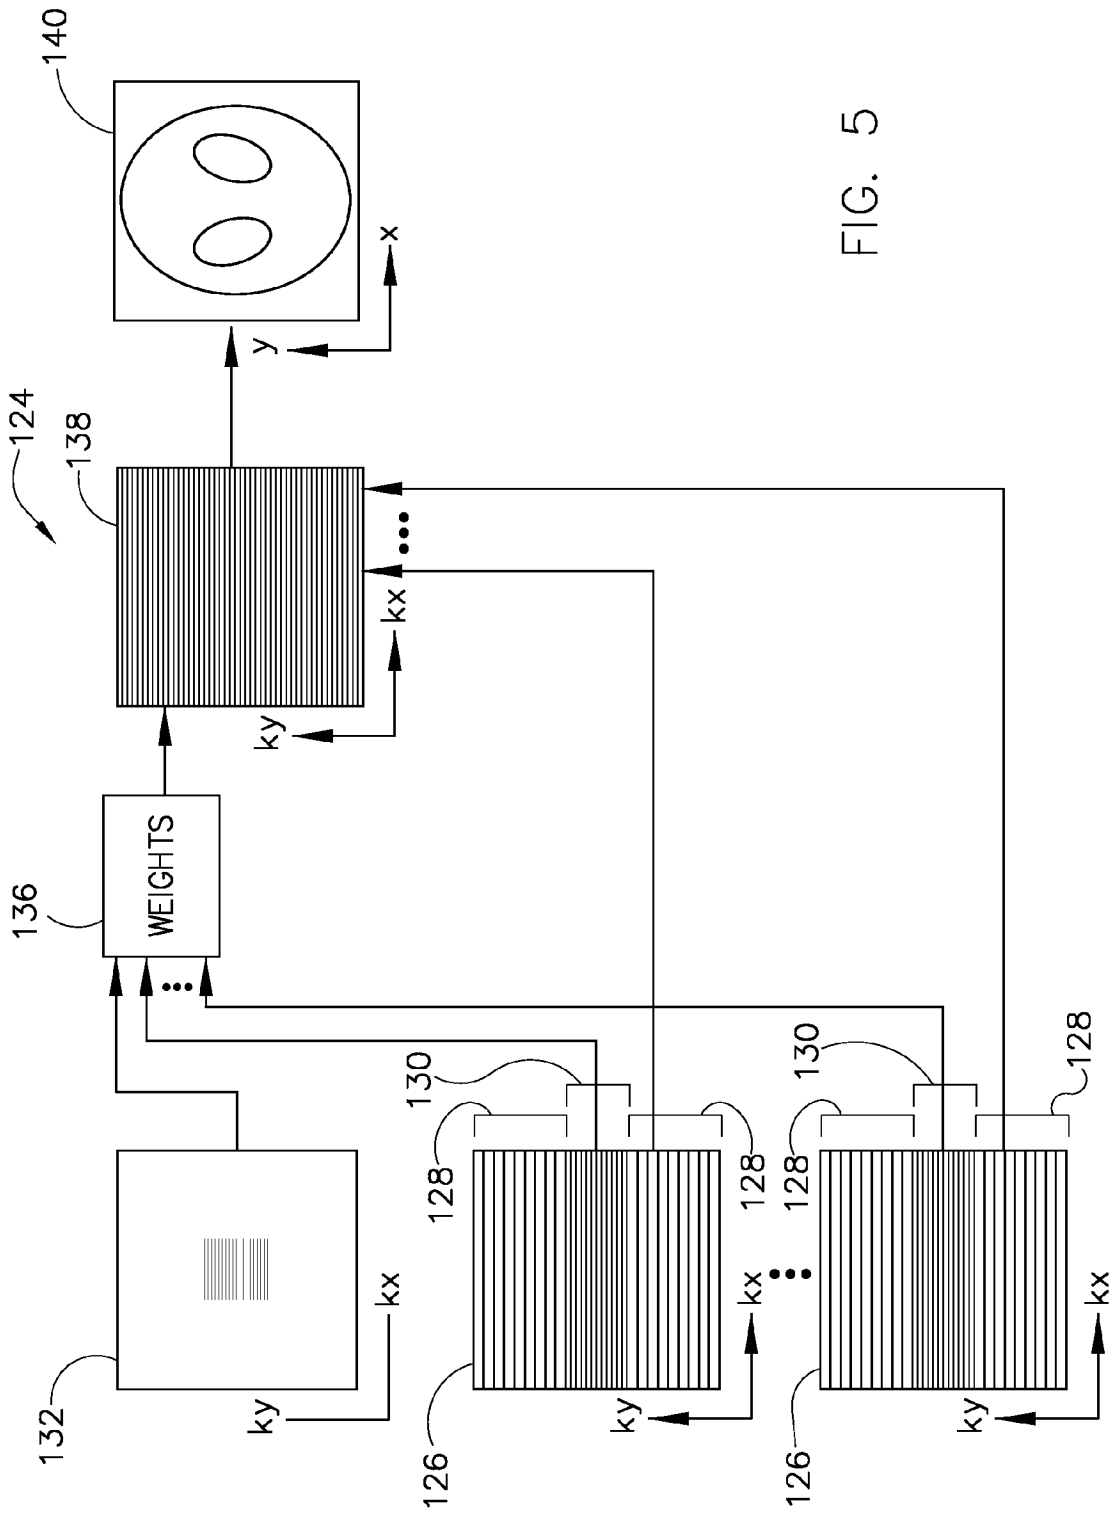


FIG. 5

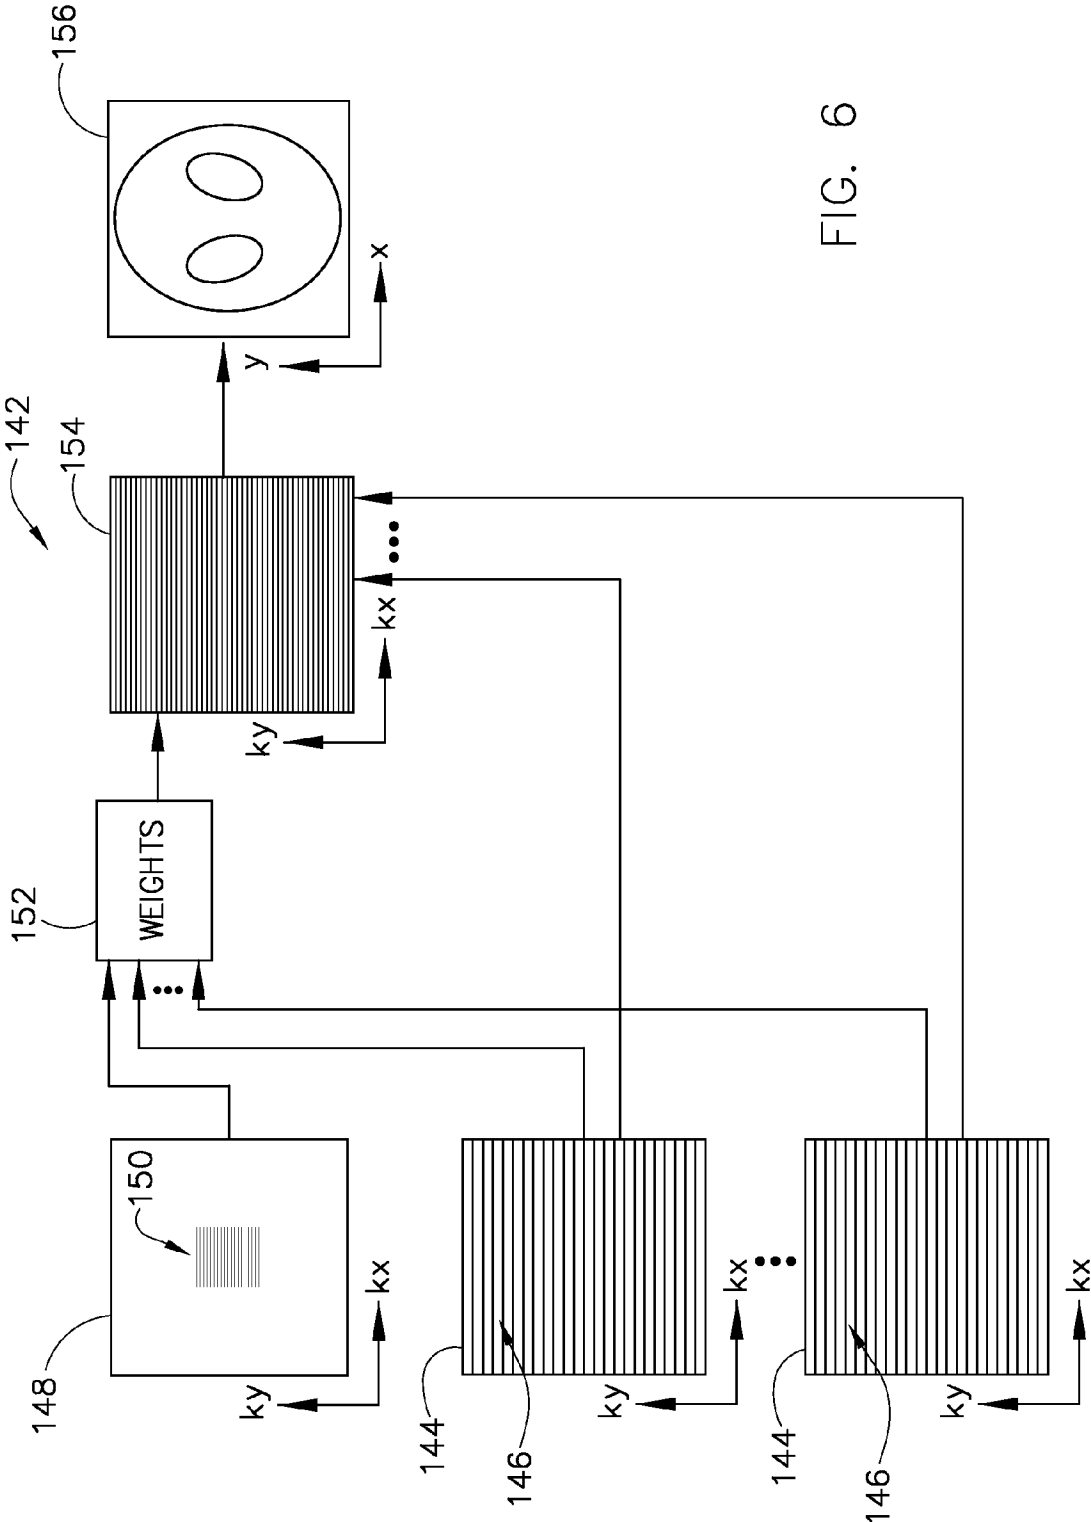


FIG. 6

SYSTEM AND METHOD OF PARALLEL IMAGING WITH CALIBRATION TO A SEPARATE COIL

BACKGROUND OF THE INVENTION

The present invention relates generally to magnetic resonance (MR) imaging and, more particularly, to a flexible approach for sampling and reconstructing an image of an imaging volume with multiple receiver coils to accelerate data acquisition.

When a substance such as human tissue is subjected to a uniform magnetic field (polarizing field B_0), the individual magnetic moments of the spins in the tissue attempt to align with this polarizing field, but precess about it in random order at their characteristic Larmor frequency. If the substance, or tissue, is subjected to a magnetic field (excitation field B_1) which is in the x-y plane and which is near the Larmor frequency, the net aligned moment, or “longitudinal magnetization”, M_z , may be rotated, or “tipped”, into the x-y plane to produce a net transverse magnetic moment M_r . A signal is emitted by the excited spins after the excitation signal B_1 is terminated and this signal may be received and processed to form an image.

When utilizing these signals to produce images, magnetic field gradients (G_x , G_y , and G_z) are employed. Typically, the region to be imaged is scanned by a sequence of measurement cycles in which these gradients vary according to the particular localization method being used. The resulting set of received NMR signals are digitized and processed to reconstruct the image using one of many well known reconstruction techniques.

One technique that has been developed to accelerate MR data acquisition is commonly referred to as “parallel imaging” or “partial parallel imaging”. In parallel imaging, multiple receive coils acquire data from a region or volume of interest. Thus, parallel imaging is used to accelerate data acquisition in one or more dimensions by exploiting the spatial dependence of phased array coil sensitivity. Parallel imaging has been shown to be successful in reducing scan time, but also reducing image blurring and geometric distortions. Moreover, parallel imaging can be used to improve spatial or temporal resolution as well as increased volumetric coverage.

There are several types of parallel imaging (PI) reconstruction methods that have been developed to generate the final, unaliased image from accelerated data. These methods can generally be divided into two categories based on how they treat the reconstruction problem: 1) SENSE-based techniques (Sensitivity Encoding) estimate coil sensitivity profiles from low-resolution calibration images, which can then be used to unwrap aliased pixels in image space using a direct inversion algorithm; and 2) autocalibrating PI-based methods, such as GRAPPA (Generalized Auto-calibrating Partially Parallel Acquisition) and ARC (Autocalibrating Reconstruction for Cartesian sampling), that calculate reconstruction weights necessary to synthesize unacquired data directly from acquired data using an algorithm that does not require coil sensitivity estimates. The reconstruction weights for GRAPPA and ARC are calculated from a small amount of fully sampled calibration data that is typically embedded within the scan (“auto-calibration”), but can also be acquired before or after the scan. Thus, GRAPPA and ARC exploit receiver coil sensitivity variation to accelerate data acquisition and synthesize the missing data using pre-calculated calibration information obtained from the particular imaging setup. While both SENSE- and autocalibrating PI-based approaches have been successful, in practice, autocalibrating

PI-based techniques have been shown to be preferred when accurate coil sensitivity estimates cannot be obtained, for example, in reduced FOV applications, and because they exhibit relatively benign image artifacts across a variety of applications.

However, a disadvantage of GRAPPA-based techniques is that they are computationally expensive because they are per-coil reconstructions. In conventional GRAPPA-based techniques, a complete dataset for each receiver coil is reconstructed from the accelerated data from that coil and the accelerated data from at least one other coil. The linear combination weights needed to perform the reconstruction are calculated during an initial training phase. The training phase is performed using a small amount of fully sampled calibration data that is acquired on each receiver coil either before, during, or after the accelerated scan. The reconstruction weights are determined by fitting the calibration data from all coils to the calibration data on a single coil in the group. This process is repeated for each coil in the group.

In other words, for GRAPPA-based techniques, each individual coil dataset is reconstructed using information from a plurality of coils. The multiple separate coil images can then be combined via a sum-of-squares reconstruction to create a final composite image. While performing a per-coil reconstruction eliminates the phase cancellation problems observed in implementations such as VD-AUTO-SMASH, it introduces a significant computation burden. Specifically, the computational expense of GRAPPA-based methods is proportional to N_c^2 , where N_c is the number of surface coils. Thus, the computation time scales exponentially as the number of coils increases.

It would therefore be desirable to have a system and method capable of retaining the image quality benefit of GRAPPA-based methods while reducing the computation requirement.

BRIEF DESCRIPTION OF THE INVENTION

The present invention provides a system and method of parallel imaging that overcome the aforementioned drawbacks. Weights for synthesizing data from a plurality of RF coils are calculated using data acquired in the plurality of RF coils as well as data acquired in at least one other RF coil that is not one of the plurality of RF coils. The weights are determined based on a relationship between the data from the plurality of RF coils to the data from the at least one other RF coil.

In accordance with an aspect of the invention, an MRI apparatus includes a magnetic resonance imaging (MRI) system having a plurality of gradient coils positioned about a bore of a magnet. The MRI apparatus also includes an RF transceiver system to acquire MR data from an RF coil assembly. The RF coil assembly includes a plurality of RF source coils and an RF target coil separate from the plurality of RF source coils. A computer is included and programmed to acquire MR data of an imaging object from each of the plurality of RF source coils and to acquire MR data of the imaging object from the RF target coil. The computer is further programmed to calculate a set of weights based on a relationship between MR data acquired from each RF source coil and MR data acquired from the RF target coil and to reconstruct an image based on an application of the set of weights to at least a portion of the MR data acquired from each of the plurality of RF source coils.

In accordance with another aspect of the invention, a method of MR imaging includes acquiring a first set of MR calibration signals from excited nuclei in a subject to be

scanned from each of a plurality of RF analysis coils and acquiring a second set of MR calibration signals from the excited nuclei from an RF synthesis coil, wherein the RF synthesis coil is not one of the plurality of RF analysis coils. The method also includes generating a plurality of synthesis weights based on the relationship between the first and second sets of MR calibration signals. A set of accelerated MR data is acquired from the excited nuclei from each of the plurality of RF analysis coils. The method also includes reconstructing an image from an application of the plurality of synthesis weights to the sets of accelerated MR data.

In accordance with another aspect of the invention, a computer readable storage medium having a program stored thereon that when executed by a processor causes the processor to access a first set of MR data of an imaging object acquired from each of at least two RF source coils and access a second set of MR data of the imaging object acquired from each of at least one RF target coil, the at least one RF target coil different than the at least two RF source coils. Each first set of MR data is related to each second set of MR data to calculate a series of weights, and the series of weights is stored in memory.

Various other features and advantages of the present invention will be made apparent from the following detailed description and the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

The drawings illustrate one preferred embodiment presently contemplated for carrying out the invention.

In the drawings:

FIG. 1 is a schematic block diagram of an MR imaging system incorporating the present invention.

FIG. 2 is a schematic diagram of an autocalibrating parallel imaging technique according to an embodiment of the present invention.

FIG. 3 is a schematic diagram of an autocalibrating parallel imaging technique according to an embodiment of the present invention.

FIG. 4 is a schematic diagram of an autocalibrating parallel imaging technique according to another embodiment of the present invention.

FIG. 5 is a schematic diagram of an autocalibrating parallel imaging technique according to another embodiment of the present invention.

FIG. 6 is a schematic diagram of an autocalibrating parallel imaging technique according to another embodiment of the present invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The present invention is directed to a parallel imaging reconstruction technique that reduces the cost of applying the weights to reconstruct an image. The technique is applicable to numerous parallel imaging methods and is used for efficiently reconstructing a magnetic resonance (MR) image.

K-space is well-known in the art of MR imaging as a matrix that functions as, or is equivalent to, a "frequency domain" repository for positive and negative spatial frequency values that are encoded as complex numbers, e.g., $a+bi$, $i=\sqrt{-1}$. That is, the k-space matrix is generally recognized as the repository for spatial frequency signals acquired during evolution and decay of an MR echo. The k-space matrix is typically filled with frequency encoded data in the k_x direction by a frequency encode gradient and in the k_y direction by a phase encode gradient, and can also include phase encoded data in

the k_z direction by a second phase encode gradient. Data acquired from the echo is deposited in the k-space matrix in a row, specifically determined by the frequency and phase encode gradient strengths applied during MR signal evolution. K-space is generally filled one row at a time in a Cartesian manner. After all the k-space has been acquired, the elements of the k-space matrix contain positionally-dependent phase change variations along the k_x (frequency encode) and k_y (phase encode) direction. A 2D inverse Fourier transform decodes the frequency domain information. The 2D Fourier transform is a two step process. First, a row-by-row 1D Fourier transform converts each row of k-space data. After the row-by-row Fourier transform, a column-by-column 1D Fourier transform is performed. Collectively, the pair of 1D Fourier transforms converts the k-space data from the frequency domain (k-space data) to the spatial domain (image space data). An image is then reconstructed from the image matrix illustrating spatial and contrast characteristics of the object imaged.

Referring to FIG. 1, the major components of a preferred magnetic resonance imaging (MRI) system 10 incorporating the present invention are shown. The operation of the system is controlled from an operator console 12 which includes a keyboard or other input device 13, a control panel 14, and a display screen 16. The console 12 communicates through a link 18 with a separate computer system 20 that enables an operator to control the production and display of images on the display screen 16. The computer system 20 includes a number of modules which communicate with each other through a backplane 20a. These include an image processor module 22, a CPU module 24 and a memory module 26, known in the art as a frame buffer for storing image data arrays. The computer system 20 is linked to disk storage 28 and tape drive 30 for storage of image data and programs, and communicates with a separate system control 32 through a high speed serial link 34. The input device 13 can include a mouse, joystick, keyboard, track ball, touch activated screen, light wand, voice control, or any similar or equivalent input device, and may be used for interactive geometry prescription.

The system control 32 includes a set of modules connected together by a backplane 32a. These include a CPU module 36 and a pulse generator module 38 which connects to the operator console 12 through a serial link 40. It is through link 40 that the system control 32 receives commands from the operator to indicate the scan sequence that is to be performed. The pulse generator module 38 operates the system components to carry out the desired scan sequence and produces data which indicates the timing, strength and shape of the RF pulses produced, and the timing and length of the data acquisition window. The pulse generator module 38 connects to a set of gradient amplifiers 42, to indicate the timing and shape of the gradient pulses that are produced during the scan. The pulse generator module 38 can also receive patient data from a physiological acquisition controller 44 that receives signals from a number of different sensors connected to the patient, such as ECG signals from electrodes attached to the patient. And finally, the pulse generator module 38 connects to a scan room interface circuit 46 which receives signals from various sensors associated with the condition of the patient and the magnet system. It is also through the scan room interface circuit 46 that a patient positioning system 48 receives commands to move the patient to the desired position for the scan.

The gradient waveforms produced by the pulse generator module 38 are applied to the gradient amplifier system 42 having G_x , G_y , and G_z amplifiers. Each gradient amplifier excites a corresponding physical gradient coil in a gradient

5

coil assembly generally designated **50** to produce the magnetic field gradients used for spatially encoding acquired signals. The gradient coil assembly **50** forms part of a magnet assembly **52** which includes a polarizing magnet **54** and a whole-body RF coil **56**. A transceiver module **58** in the system control **32** produces pulses which are amplified by an RF amplifier **60** and coupled to the RF coil **56** by a transmit/receive switch **62**. The resulting signals emitted by the excited nuclei in the patient may be sensed by the same RF coil **56** and coupled through the transmit/receive switch **62** to a preamplifier **64**. The amplified MR signals are demodulated, filtered, and digitized in the receiver section of the transceiver **58**. The transmit/receive switch **62** is controlled by a signal from the pulse generator module **38** to electrically connect the RF amplifier **60** to the coil **56** during the transmit mode and to connect the preamplifier **64** to the coil **56** during the receive mode. The transmit/receive switch **62** can also enable a separate RF coil (for example, a surface coil) to be used in either the transmit or receive mode.

The MR signals picked up by the RF coil **56** are digitized by the transceiver module **58** and transferred to a memory module **66** in the system control **32**. A scan is complete when an array of raw k-space data has been acquired in the memory module **66**. This raw k-space data is rearranged into separate k-space data arrays for each image to be reconstructed, and each of these is input to an array processor **68** which operates to Fourier transform the data into an array of image data. This image data is conveyed through the serial link **34** to the computer system **20** where it is stored in memory, such as disk storage **28**. In response to commands received from the operator console **12**, this image data may be archived in long term storage, such as on the tape drive **30**, or it may be further processed by the image processor **22** and conveyed to the operator console **12** and presented on the display **16**.

The MR system described in FIG. 1 may also be equipped with a receive coil array that picks up the MR signals. Such coil arrays are well-known in the art and include whole body arrays as well as partial body arrays, such as head coil arrays, cardiac coil arrays, and spine coil arrays. As will be described, the invention includes a parallel imaging method wherein a region or volume of interest is sampled with an array of RF receive coils. The array of RF receive coils includes one or more source or analysis coils and one or more target for synthesis coils. In this regard, the invention is not limited to a particular coil array type or orientation.

As is known in the art of parallel imaging, the sensitivity of each receiver coil element to the field-of-view (FOV) can be exploited to accelerate the data acquisition process (i.e., perform an accelerated scan). The image data of each coil are multiplied by the coil sensitivity inherent to each coil element. The corresponding k-space data are convolved with the Fourier Transform of the spatial coil sensitivity distribution. The spatial coil sensitivity variation imposed by the individual receive coils provides additional spatial encoding functionality complementary to regular gradient encoding that is the basis of all parallel imaging methods. In 2D imaging, that sensitivity is exploited to reduce the number of phase encoding steps in one dimension or direction. In 3D imaging, that sensitivity can be exploited to reduce the number of phase encoding steps in up to two dimensions or directions. Since, in practice, it can be extremely difficult to accurately measure the coil sensitivity inherent to each coil element, autocalibrating techniques are often implemented for parallel imaging.

Referring now to FIG. 2, a schematic representation of an RF coil array **70** useful in an autocalibrating parallel imaging technique according to an embodiment of the present invention is illustrated. RF coil array **70** includes an array of source

6

coils **71** used to acquire calibration and imaging data for a FOV and includes eight separate surface coil elements **72-79**. In a preferred embodiment, the imaging data represents data from a reduced FOV. RF coil array **70** also includes an array of target coils **80** used to acquire calibration data for the FOV and, as shown, includes two separate coil elements **81, 82**. It is contemplated, however, that the array of target coils **80** may include more or less than two coil elements and that the array of source coils **71** may include more or less than eight coil elements. The number of separate coil elements **72-79, 81, 82** shown in FIG. 2 is merely an illustrative example, and the present invention is not limited to only the number of separate coil elements shown.

Each coil element **72-79, 81, 82** samples the FOV by detecting changes in excited nuclei in the FOV and transmits signals indicative of that which is detected to separate data acquisition channels **83-92**, respectively. In one embodiment, calibration data from each channel **83-92** is used to generate synthesis or linear combination weights **94** to calibration data from each channel **83, 84**. Thereafter, a respective coil image **96** for each target coil **81, 82** is calculated from the synthesis weights **92** for the respective target coil **81, 82** and the imaging data acquired in coil elements **72-79** of the array of source coils **71**. One skilled in the art will appreciate that the images **96** from each target coil **81, 82** may also be combined into a single, composite image using one of a number of known summation techniques, e.g., sum of squares.

FIG. 3 shows a schematic diagram of an autocalibrating parallel imaging technique **100** according to an embodiment of the present invention. Technique **100** includes the acquisition of calibration data in a plurality of source coils. Magnetic spins of an imaging object or subject, such as the subject shown in FIG. 1, are excited such that a large signal may be acquired therefrom. Thereafter, a k-space data set **102** for each source coil is populated with low resolution, full FOV k-space calibration data **104** having a high contrast acquired in each respective source coil.

Technique **100** also includes the acquisition of calibration data in a target coil. The target coil is not used to acquire imaging data. That is, accelerated data from the target coil itself is not acquired. In an embodiment of the invention, the target coil is a body coil, such as the whole-body RF coil **56** of MRI system **10**, which has a homogeneous sensitivity region. Accordingly, images reconstructed from calibration data acquired using a body coil have improved compensation for surface coil sensitivity variations. Alternatively, in another embodiment of the invention, the target coil maybe a large target surface coil which may have a more localized sensitivity region than a body coil.

Magnetic spins of the imaging object are excited such that signals acquired therefrom have the same or substantially similar contrast as the signals from which data is acquired in the source coils. Thereafter, a k-space data set **106** for the target coil is populated with low resolution, full FOV k-space calibration data **108** acquired in the target coil. In an embodiment of the invention, the source coils and the target coil acquire their respective calibration data **104, 108** from the same excitation of the magnetic spins. Alternatively, the target coil may acquire calibration data **108** from an excitation of the magnetic spins before or after the excitation of the magnetic spins from which the source coils acquire calibration data **104**.

Synthesis or linear combination weights **110** are calculated from a relationship between the calibration data **104** and the calibration data **108**. In this manner, linear combination weights are generated that will synthesize k-space data on the target coil from k-space data on the source coils. In one

embodiment of the present invention, synthesis weights **110** are generated directly by fitting calibration data **104** from each source coil to the calibration data **108** of the target coil according to known methods. In another embodiment of the present invention, it is envisioned that linear combination weights can be generated from complex valued numbers, identified herein as "correlation values." Correlation values are generated by way of an intermediate calculation that is performed using the calibration data. That is, a correlation value is generated that relates two encoding locations (or encoding vectors) to each other, the encoding locations being selected from calibration data that has been plotted in k-space on a Kx-Ky plane. Each encoding location is specified by a pair of values, (j, k), that are defined by an integer coil index, j, that corresponds with a specified receiver coil in the RF coil array, and a k-space location, k. These correlation values are entered into one or more systems of linear equations to determine the linear combination weights **110**.

Still referring to FIG. 3, technique **100** includes the population of k-space data sets **112** for each source coil. Magnetic spins of the imaging object are excited such that signals acquired therefrom have a diagnostically useful contrast that may have a different signal-to-noise ratio (SNR) and/or contrast than the signals from which calibration data **104**, **108** is acquired. Thereafter, each k-space data set **112** is populated with a full resolution, reduced FOV data set **114** acquired in an accelerated scan. It is contemplated that the reduced FOV data sets **114** may be acquired before, during, or after acquisition of the calibration data **104**, **108**.

Technique **100** includes using the weights **110** to construct a full resolution, full FOV k-space data set **116** for the target coil. In an embodiment of the invention, k-space data set **116** is generated from a linear combination of the application of the weights **110** to the data in each k-space data set **112**. Thereafter, a 2D Fourier transform is applied to k-space data set **116** to reconstruct an image **118**.

FIG. 4 shows a schematic diagram of an autocalibrating parallel imaging technique **120** according to another embodiment of the present invention. The technique **120** shown in FIG. 4 is similar to that shown in FIG. 3 with the addition of multiple target coils. Each target coil has a respective k-space data set **106** populated with calibration data **108**. The synthesis weights **110** include weights calculated from a relationship between the calibration data **104** to the calibration data **108** of each target coil. A full resolution, full FOV k-space data set **116** for each target coil is also constructed to which a 2D Fourier transform is applied to reconstruct an image **118** for each target coil. Additionally, as described in FIG. 2, the images **118** from each target coil may be combined into a single, composite image **122** using one of a number of known summation techniques, e.g., sum of squares.

FIG. 5 shows a schematic diagram of an autocalibrating parallel imaging technique **124** according to another embodiment of the present invention. Technique **124** includes exciting magnetic spins of an imaging object such that a large signal may be acquired therefrom. Thereafter, a k-space data set **126** for each source coil is populated with a full resolution, reduced FOV data set **128** acquired in an accelerated scan having a diagnostically useful contrast. Each k-space data set **126** is also simultaneously populated with low resolution, calibration data **130**. In this manner, acquisitions of accelerated data and calibration data may be combined.

Technique **124** also includes the acquisition of calibration data in a target coil. In an embodiment of the invention, the target coil is a body coil. Magnetic spins of the imaging object are excited, and a k-space data set **132** for the target coil is populated with low resolution, full FOV k-space calibration

data **134** acquired in the target coil having a diagnostically useful contrast. In an embodiment of the invention, the source coils and the target coil acquire their respective data **128**, **130**, **134** from the same excitation of the magnetic spins. Alternatively, the target coil may acquire calibration data **134** from an excitation of the magnetic spins before or after the excitation of the magnetic spins from which the source coils acquire data for the reduced FOV data set **128** and/or calibration data **130**.

Synthesis or linear combination weights **136** are calculated from a relationship between the calibration data **130** and the calibration data **132** as described above with respect to FIG. 3. In this manner, linear combination weights **136** are generated that will synthesize k-space data on the target coil from k-space data on the source coils. The weights **136** are used to construct a full resolution, full FOV k-space data set **138** for the target coil. In an embodiment of the invention, k-space data set **138** is generated from a linear combination of the application of the weights **136** to each k-space data set **126**. Thereafter, a 2D Fourier transform is applied to k-space data set **138** to reconstruct an image **140**.

It is contemplated that an embodiment of technique **124** may include multiple target coils (not shown). Accordingly, as described with respect to FIG. 4, each target coil of technique **124** would have a corresponding k-space data set **132** populated with calibration data **134** for that target coil. Additionally, the synthesis weights **136** would include weights calculated from a relationship between the calibration data **130** to the calibration data **134** of each target coil. A full resolution, full FOV k-space data set **138** for each target coil would also be constructed to which a 2D Fourier transform would be applied to reconstruct an image **140** for each target coil. Furthermore, the images **140** from each target coil may be combined into a single, composite image (not shown) using one of a number of known summation techniques, e.g., sum of squares.

FIG. 6 shows a schematic diagram of an autocalibrating parallel imaging technique **142** according to another embodiment of the present invention. Technique **142** includes exciting magnetic spins of an imaging object such that a large signal may be acquired therefrom. Thereafter, a k-space data set **144** for each source coil is populated with a full resolution, reduced FOV data set **146** acquired in an accelerated scan having a diagnostically useful contrast.

Technique **142** also includes the acquisition of calibration data in a target coil. In an embodiment of the invention, the target coil is a body coil. Magnetic spins of the imaging object are excited, and a k-space data set **148** for the target coil is populated with low resolution, full FOV k-space calibration data **150** acquired in the target coil having a diagnostically useful contrast. In an embodiment of the invention, the source coils and the target coil acquire their respective data **146**, **150** from the same excitation of the magnetic spins. Alternatively, the target coil may acquire calibration data **150** from an excitation of the magnetic spins before or after the excitation of the magnetic spins from which the source coils acquire data for the reduced FOV data set **146**.

Synthesis or linear combination weights **152** are calculated from a relationship between the data in the reduced FOV data set **146** and the calibration data **150** as described above with respect to FIG. 3. In this manner, linear combination weights **152** are generated that will synthesize k-space data on the target coil from k-space data on the source coils. The weights **152** are used to construct a full resolution, full FOV k-space data set **154** for the target coil. In an embodiment of the invention, k-space data set **154** is generated from a linear combination of the application of the weights **152** to each

k-space data set **144**. Thereafter, a 2D Fourier transform is applied to k-space data set **154** to reconstruct an image **156**.

It is contemplated that an embodiment of technique **142** may include multiple target coils (not shown). Accordingly, as described with respect to FIG. **4**, each target coil of technique **142** would have a corresponding k-space data set **148** populated with calibration data **150** for that target coil. Additionally, the synthesis weights **152** would include weights calculated from a relationship between the data in the reduced FOV data set **146** and the calibration data **150** of each target coil. A full resolution, full FOV k-space data set **154** for each target coil would also be constructed to which a 2D Fourier transform would be applied to reconstruct an image **156** for each target coil. Furthermore, the images **156** from each target coil may be combined into a single, composite image (not shown) using one of a number of known summation techniques, e.g., sum of squares.

In another embodiment, it is envisioned that unacquired MR data is filled-in in hybrid space. "Hybrid space" refers to the intermediate matrix that results in the performance of one of the 1D Fourier transforms that comprise the 2D Fourier transform that converts k-space to image space. In other words, in 2D Fourier imaging, one Fourier transform is performed in the frequency encoding direction and another Fourier transform is performed in the phase encoding direction. The matrix after the first 1D Fourier transform is considered a "hybrid space". That is, the data is no longer "untransformed" and therefore not considered k-space; however, the data, as a whole, is not yet in the spatial domain and, thus, not in "image space".

Upon generation of the linear coefficient weights **110**, **136**, **152** as described above with respect to FIGS. **3-6**, the weights **110**, **136**, **152** are transformed into hybrid-space weights to be applied to imaging data that has been similarly transformed into that space. That is, the linear coefficient weights **110**, **136**, **152** are Fourier transformed in one dimension (typically the frequency-encode dimension) to form a set of hybrid weights. The k-space data sets **112**, **126**, **144** are Fourier transformed in the one dimension to generate hybrid-space data sets, where missing data in the hybrid spaces are synthesized efficiently from the acquired imaging and calibration data in hybrid space so as to yield complete hybrid spaces. The hybrid spaces are then reconstructed to respective coil images **118**, **140**, **156**, by application of a 1D Fourier transformation in the phase encoding direction. This results in a "coil" image **118**, **140**, **156** for each target or synthesis coil.

In yet another embodiment, it is envisioned that the weights **110**, **136**, **152** are transformed into image-space weights to be applied to imaging data that has been similarly transformed into that space. That is, the linear coefficient weights **110**, **136**, **152** are Fourier transformed in two dimensions (i.e., the frequency- and phase-encode dimensions) to form a set of image weights. The k-space data sets **112**, **126**, **144** are Fourier transformed in the two dimensions to generate image-space data sets, where missing data in the image spaces are synthesized efficiently from the acquired imaging and calibration data in image space so as to yield complete image spaces forming respective coil images **118**, **140**, **156** for each target or synthesis coil.

An advantage of an embodiment of the invention as described above is that a single target-coil data set, rather than multiple source-coil data sets, can be reconstructed, resulting in considerable computation savings. As such, a cost savings may be realized from reduced hardware/processing demands. The target coil calibration data can be acquired with different SNR and contrast as the accelerated scan. Additionally, when using a body coil for the target coil, which has a relatively

homogenous signal response, its reconstructed image will inherently compensate for surface coil sensitivity variations, which may reduce coil sensitivity shading.

A technical contribution for the disclosed method and apparatus is that it provides for a computer implemented technique for sampling and reconstructing an image of an imaging volume with multiple receiver coils to accelerate data acquisition.

In accordance with an embodiment of the invention, an MRI apparatus includes a magnetic resonance imaging (MRI) system having a plurality of gradient coils positioned about a bore of a magnet. The MRI apparatus also includes an RF transceiver system to acquire MR data from an RF coil assembly. The RF coil assembly includes a plurality of RF source coils and an RF target coil separate from the plurality of RF source coils. A computer is included and programmed to acquire MR data of an imaging object from each of the plurality of RF source coils and to acquire MR data of the imaging object from the RF target coil. The computer is further programmed to calculate a set of weights based on a relationship between MR data acquired from each RF source coil and MR data acquired from the RF target coil and to reconstruct an image based on an application of the set of weights to at least a portion of the MR data acquired from each of the plurality of RF source coils.

In accordance with another embodiment of the invention, a method of MR imaging includes acquiring a first set of MR calibration signals from excited nuclei in a subject to be scanned from each of a plurality of RF analysis coils and acquiring a second set of MR calibration signals from the excited nuclei from an RF synthesis coil, wherein the RF synthesis coil is not one of the plurality of RF analysis coils. The method also includes generating a plurality of synthesis weights based on the relationship between the first and second sets of MR calibration signals. A set of accelerated MR data is acquired from the excited nuclei from each of the plurality of RF analysis coils. The method also includes reconstructing an image from an application of the plurality of synthesis weights to the sets of accelerated MR data.

In accordance with another embodiment of the invention, a computer readable storage medium having a program stored thereon that when executed by a processor causes the processor to access a first set of MR data of an imaging object acquired from each of at least two RF source coils and access a second set of MR data of the imaging object acquired from each of at least one RF target coil, the at least one RF target coil different than the at least two RF source coils. Each first set of MR data is related to each second set of MR data to calculate a series of weights, and the series of weights is stored in memory.

The present invention has been described in terms of the preferred embodiment, and it is recognized that equivalents, alternatives, and modifications, aside from those expressly stated, are possible and within the scope of the appending claims.

What is claimed is:

1. An MRI apparatus comprising:

- a magnetic resonance imaging (MRI) system having a plurality of gradient coils positioned about a bore of a magnet;
- an RF transceiver system to acquire MR data from an RF coil assembly, the RF coil assembly comprising:
 - a plurality of RF source coils; and
 - an RF target coil separate from the plurality of RF source coils; and
- a computer programmed to:

11

acquire MR data of an imaging object from each of the plurality of RF source coils, wherein at least a portion of the MR data is accelerated MR data;

acquire MR data of the imaging object from the RF target coil;

calculate a set of weights based on a relationship between MR data acquired from each RF source coil and MR data acquired from the RF target coil; and

calculate a full field-of-view MR data set for the RF target coil based on an application of the set of weights to at least a portion of the MR data acquired from at least one of the plurality of RF source coils, wherein at least one dimension of the full field-of-view MR data set is in the frequency domain; and

reconstruct an image based on the calculated full field-of-view MR data set.

2. The MRI apparatus of claim 1 wherein the computer, in being programmed to acquire MR data of the imaging object from the RF target coil, is programmed to acquire low resolution MR data from a full field-of-view (FOV) from the RF target coil.

3. The MRI apparatus of claim 2 wherein the computer, in being programmed to acquire MR data of the imaging object from each of the plurality of RF source coils, is further programmed to acquire a set of reduced FOV MR data of the imaging object from each of the plurality of RF source coils.

4. The MRI apparatus of claim 3 wherein the computer, in being programmed to acquire MR data of the imaging object from each of the plurality of RF source coils, is further programmed to acquire autocalibration MR data of the imaging object from each of the plurality of RF source coils.

5. The MRI apparatus of claim 4 wherein the autocalibration MR data comprises low resolution MR data from the full FOV.

6. The MRI apparatus of claim 4 wherein the computer, in being programmed to calculate a set of weights, is programmed to calculate the set of weights based on the relationship between the autocalibration MR data from each of the plurality of RF source coils and the low resolution MR data from the RF target coil.

7. The MRI apparatus of claim 6 wherein the computer is further programmed to apply the set of weights to the set of reduced FOV MR data from each of the plurality of RF source coils and construct a single, full FOV MR data set therefrom.

8. The MRI apparatus of claim 7 wherein the computer, in being programmed to reconstruct an image, is programmed to reconstruct an image from the single, full FOV MR data set.

9. The MRI apparatus of claim 3 wherein the computer, in being programmed to calculate a set of weights, is programmed to calculate the set of weights based on a relationship between a portion of the reduced FOV MR data from each of the plurality of RF source coils and the low resolution MR data from the RF target coil.

10. The MRI apparatus of claim 9 wherein the computer is further programmed to apply the set of weights to the set of reduced FOV MR data from each of the plurality of RF source coils and construct a single, full FOV MR data set therefrom.

11. The MRI apparatus of claim 10 wherein the computer, in being programmed to reconstruct an image, is programmed to reconstruct an image from the single, full FOV MR data set.

12. The MRI apparatus of claim 2 wherein the RF target coil is a body coil.

13. A method of MR imaging comprising:

acquiring a first set of MR calibration signals from excited nuclei in a subject to be scanned from each of a plurality of RF analysis coils;

12

acquiring a second set of MR calibration signals from the excited nuclei from an RF synthesis coil, wherein the RF synthesis coil is not one of the plurality of RF analysis coils;

generating a plurality of synthesis weights based on the relationship between the first and second sets of MR calibration signals;

acquiring a set of accelerated MR data from the excited nuclei from each of the plurality of RF analysis coils; and

reconstructing an image from an application of the plurality of synthesis weights to the sets of accelerated MR data.

14. The method of claim 13 wherein acquiring the second set of MR calibration signals comprises acquiring low resolution MR data from a full FOV.

15. The method of claim 14 wherein acquiring the first set of MR calibration signals comprises acquiring low resolution MR data from the full FOV.

16. The method of claim 13 wherein generating a plurality of synthesis weights comprises fitting the first set of MR calibration signals from each of the plurality of RF analysis coils to the second set of MR calibration signals.

17. The method of claim 13 wherein generating a plurality of synthesis weights comprises calculating a plurality of correlation values between the first set of MR calibration signals and second set of MR calibration signals.

18. The method of claim 13 further comprising:

applying the plurality of synthesis weights to the sets of accelerated MR data to construct a complete k-space data set; and

wherein reconstructing comprises performing a 2D Fourier transform of the complete k-space data set.

19. The method of claim 13 further comprising:

performing a 1D Fourier transform of the plurality of synthesis weights;

performing a 1D Fourier transform of the sets of accelerated MR data;

applying the plurality of synthesis weights to the sets of accelerated MR data to construct a complete hybrid-space data set; and

wherein reconstructing comprises performing a 1D Fourier transform of the complete hybrid-space data set.

20. The method of claim 13 further comprising:

performing a 2D Fourier transform of the plurality of synthesis weights;

performing a 2D Fourier transform of the sets of accelerated MR data; and

applying the plurality of synthesis weights to the sets of accelerated MR data to reconstruct a complete image.

21. The method of claim 13 wherein the set of accelerated MR data includes the first set of MR calibration signals.

22. The method of claim 13 wherein the RF synthesis coil is a body coil.

23. A computer readable storage medium having a program stored thereon that when executed by a processor causes the processor to:

access a first set of MR data of an imaging object acquired from each of at least two RF source coils, wherein at least a portion of the first set of MR data is accelerated MR data;

access a second set of MR data of the imaging object acquired from each of at least one RF target coil, the at least one RF target coil different than the at least two RF source coils;

13

relate each first set of MR data to each second set of MR data to calculate a series of linear combination weights; and

store the series of linear combination weights in memory.

24. The computer readable storage medium of claim **23** 5 wherein program further causes the processor to:

apply the series of linear combination weights to a partially filled k-space data set from each of the at least two RF source coils to generate a complete k-space data set; and reconstruct an image from the complete k-space data set. 10

25. The computer readable storage medium of claim **23** wherein program further causes the processor to:

transform the series of linear combination weights into hybrid space;

apply the transformed series of linear combination weights 15 to a partially filled hybrid-space data set from each of the at least two RF source coils to generate a complete hybrid-space data set; and

14

reconstruct an image from the complete hybrid-space data set.

26. The computer readable storage medium of claim **23** wherein program further causes the processor to:

transform the series of linear combination weights into image space;

apply the transformed series of linear combination weights to a partially filled image-space data set from each of the at least two RF source coils to reconstruct an image.

27. The computer readable storage medium of claim **23** wherein the at least one RF target coil comprises multiple RF target coils, and wherein the at least two RF source coils comprise a greater quantity of RF source coils than a quantity of the multiple RF target coils.

* * * * *