



US007762902B2

(12) **United States Patent**  
**Voden**

(10) **Patent No.:** **US 7,762,902 B2**  
(45) **Date of Patent:** **\*Jul. 27, 2010**

- (54) **ROTARY GAME TABLE**
- (75) Inventor: **Justin L. Voden**, Waukesha, WI (US)
- (73) Assignee: **Triumph Sports**
- (\*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1365 days.  
  
This patent is subject to a terminal disclaimer.

|           |      |         |                   |           |
|-----------|------|---------|-------------------|-----------|
| 572,688   | A *  | 12/1896 | Seifert           | 473/14    |
| 747,726   | A *  | 12/1903 | Karhan            | 473/9     |
| 1,345,194 | A *  | 6/1920  | Johnson           | 312/204   |
| 1,900,513 | A *  | 3/1933  | Marsh             | 273/309   |
| 2,174,613 | A *  | 10/1939 | Blaschke          | 221/199   |
| 3,770,334 | A *  | 11/1973 | Weber             | 312/223.4 |
| D247,127  | S *  | 1/1978  | Kavka             | D21/318   |
| 4,305,581 | A *  | 12/1981 | Neuharth          | 473/15    |
| 4,927,140 | A *  | 5/1990  | Pappas            | 473/8     |
| 6,109,607 | A *  | 8/2000  | Cartwright et al. | 273/108.1 |
| 6,155,564 | A *  | 12/2000 | Tsai              | 273/108.1 |
| 6,347,797 | B1 * | 2/2002  | Tsai              | 273/309   |
| 6,349,939 | B1 * | 2/2002  | Tsai              | 273/108.1 |
| 6,419,224 | B1 * | 7/2002  | Tsai              | 273/108.1 |

(21) Appl. No.: **10/455,666**

(22) Filed: **Jun. 5, 2003**

(65) **Prior Publication Data**

US 2004/0132537 A1 Jul. 8, 2004

**Related U.S. Application Data**

(63) Continuation-in-part of application No. 10/337,623, filed on Jan. 7, 2003, now Pat. No. 6,764,409.

(51) **Int. Cl.**

*A63D 15/04* (2006.01)  
*A63D 15/00* (2006.01)  
*A63D 13/00* (2006.01)

(52) **U.S. Cl.** ..... 473/10; 473/14; 473/16

(58) **Field of Classification Search** ..... 473/1,  
 473/4, 10, 14, 15, 19, 30; 108/28, 128, 6,  
 108/1, 11, 19, 12, 94; 273/309, 108.1; D21/318,  
 D21/385, 397

See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

122,830 A \* 1/1872 Heyl ..... 473/14  
 211,083 A \* 1/1879 Bensinger ..... 473/10

**FOREIGN PATENT DOCUMENTS**

CA 000744276 A \* 10/1966

\* cited by examiner


*Primary Examiner*—Mitra Aryanpour

*(74) Attorney, Agent, or Firm*—Ziolkowski Patent Solutions Group, SC

(57) **ABSTRACT**

A rotary game table includes a combination game table, two side support members, and at least one cross member. The combination game table includes a pool table surface formed on one side and an air powered hockey table surface formed on the opposite side. The at least one cross member is terminated on each end by a single side support member. The combination game table is pivotally retained by a side support member on each end thereof. To pivotally constrain the combination game table, at least one locking pin device is used; in a second embodiment at least two pivotal support arms; and in a fourth embodiment a pair of support latches. A third embodiment includes at least one side support member configured to retain a plurality of game accessories. A gaming table may be substituted for the air hockey table.

**27 Claims, 17 Drawing Sheets**

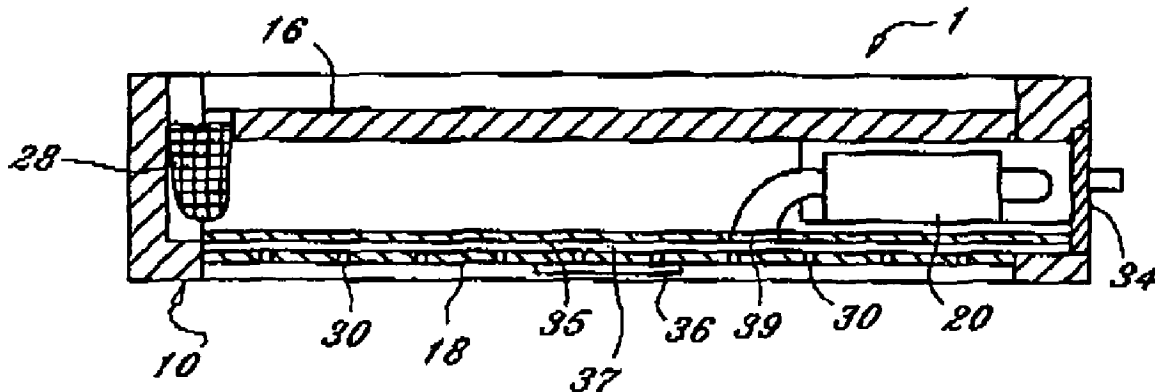

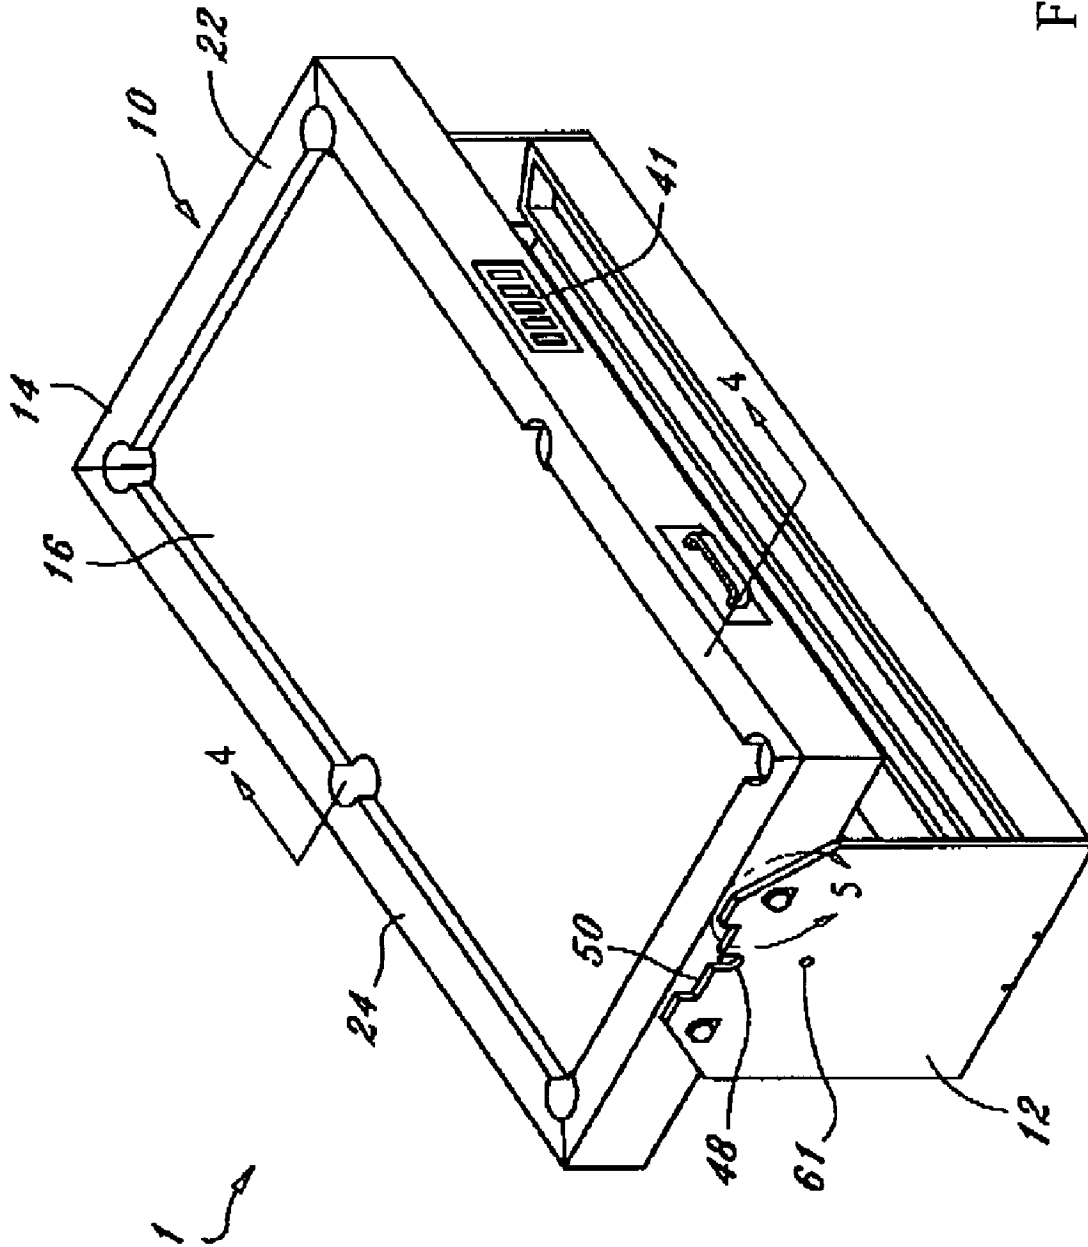


FIG. 1

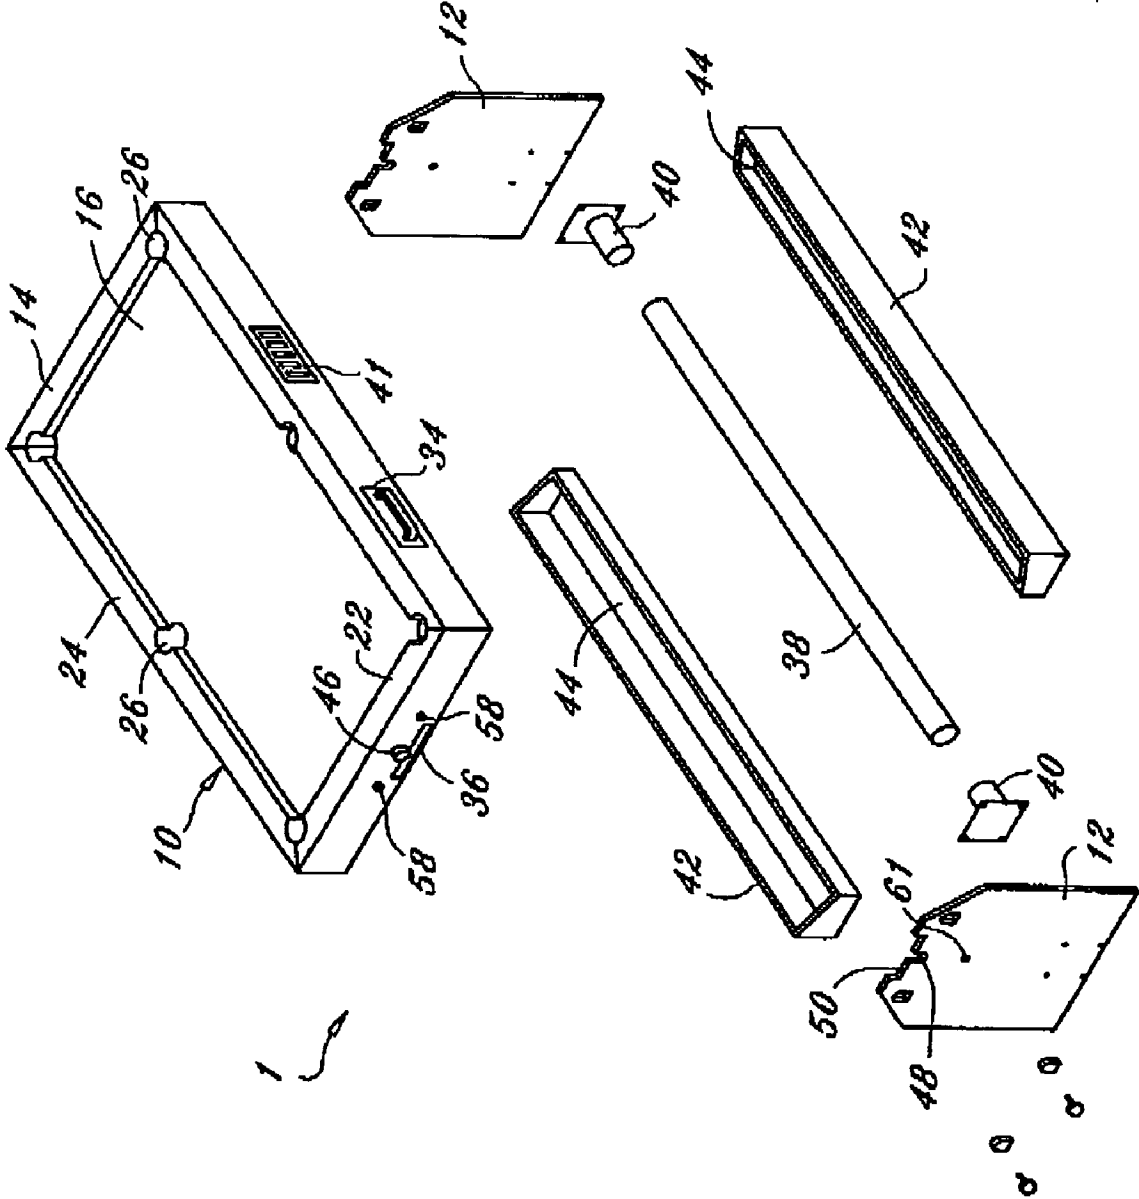


FIG. 2



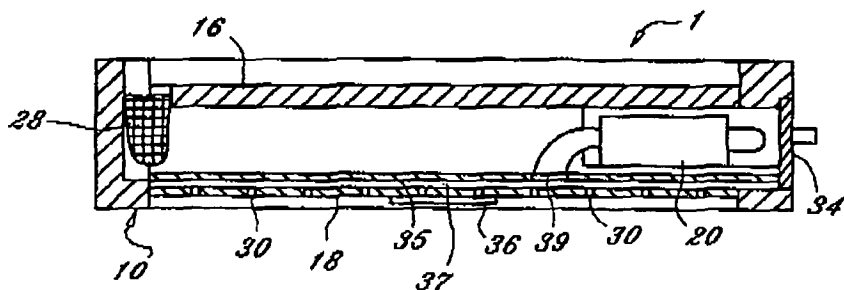


FIG. 4



FIG. 6

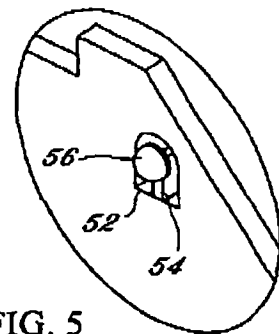


FIG. 5

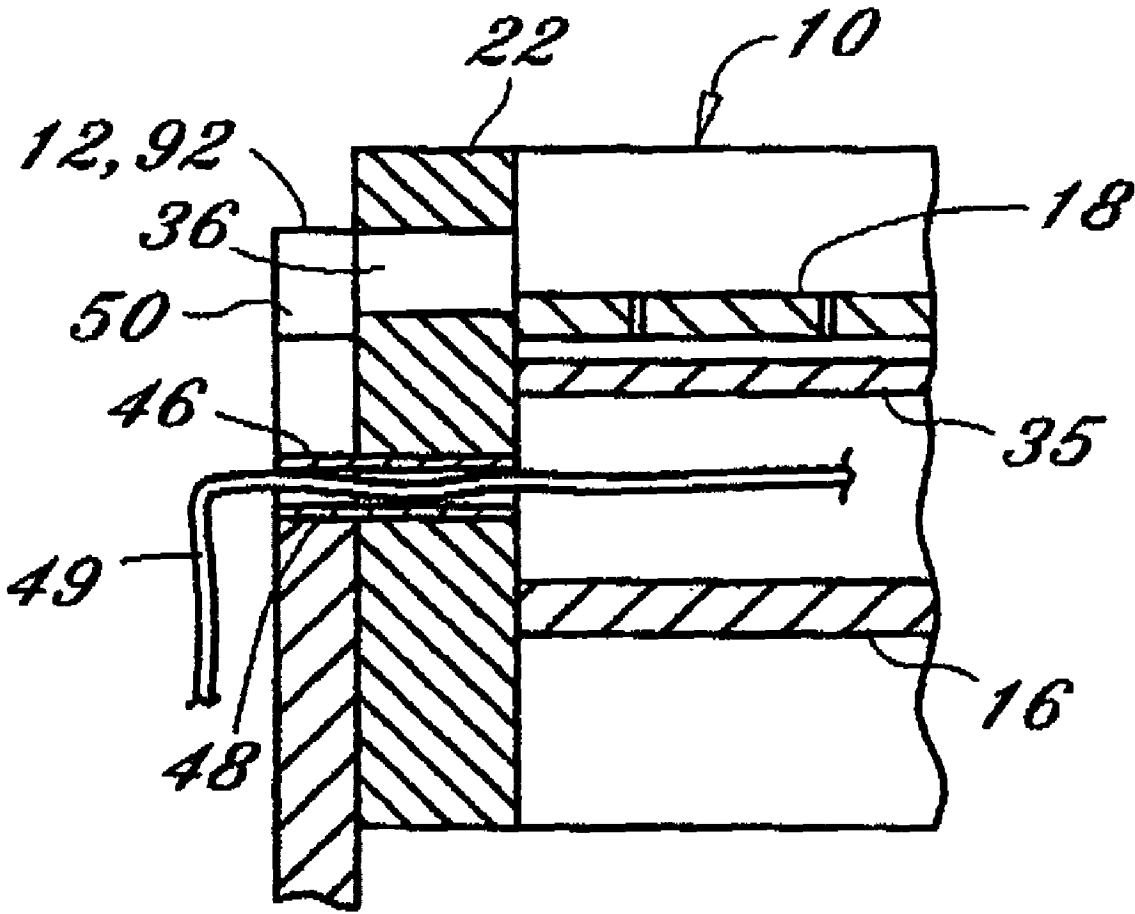


FIG. 4A

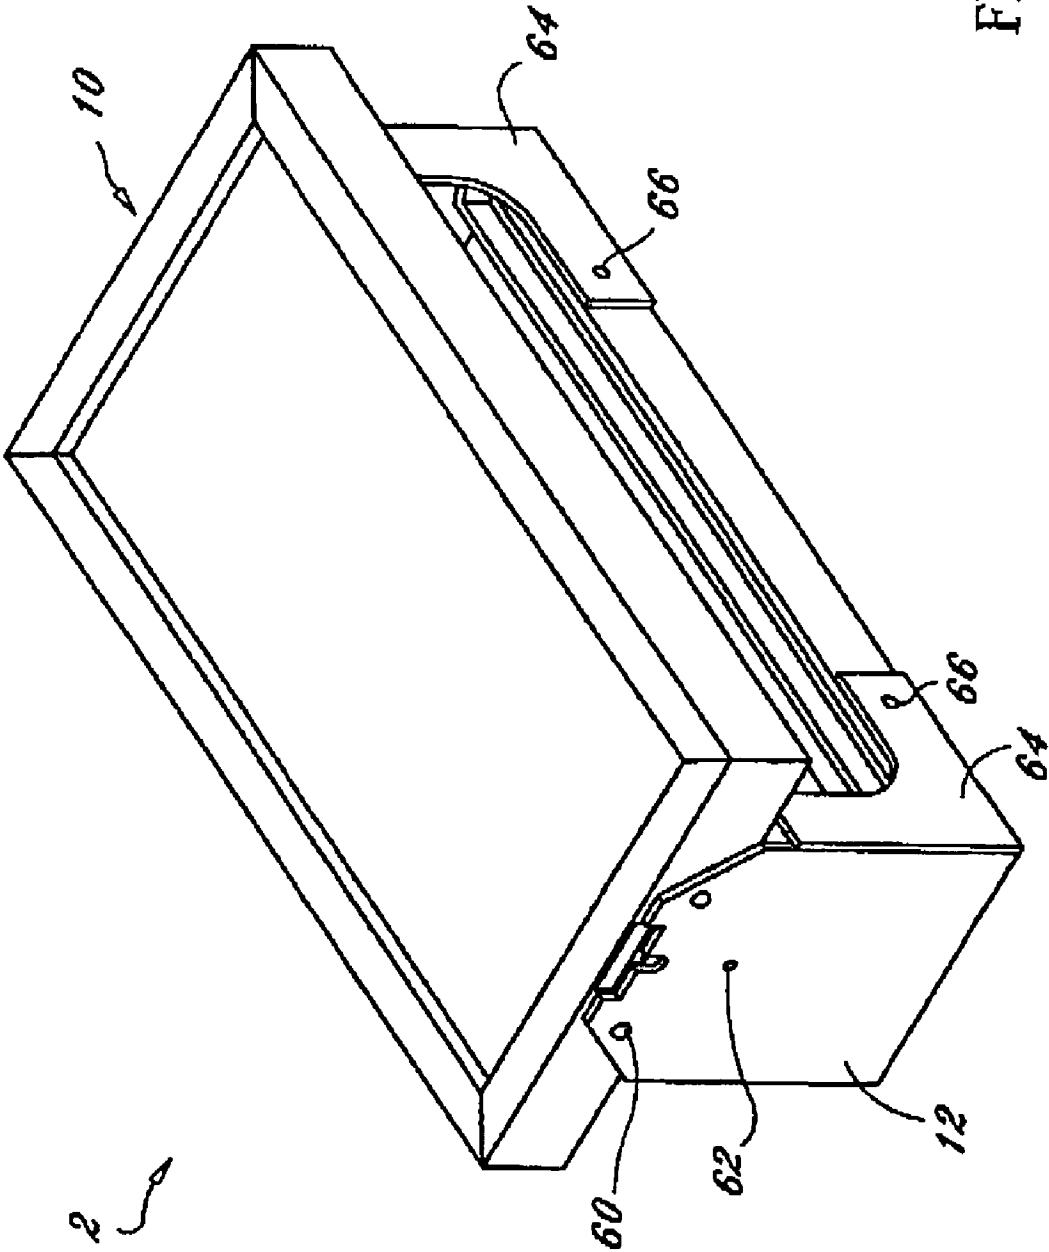


FIG. 7

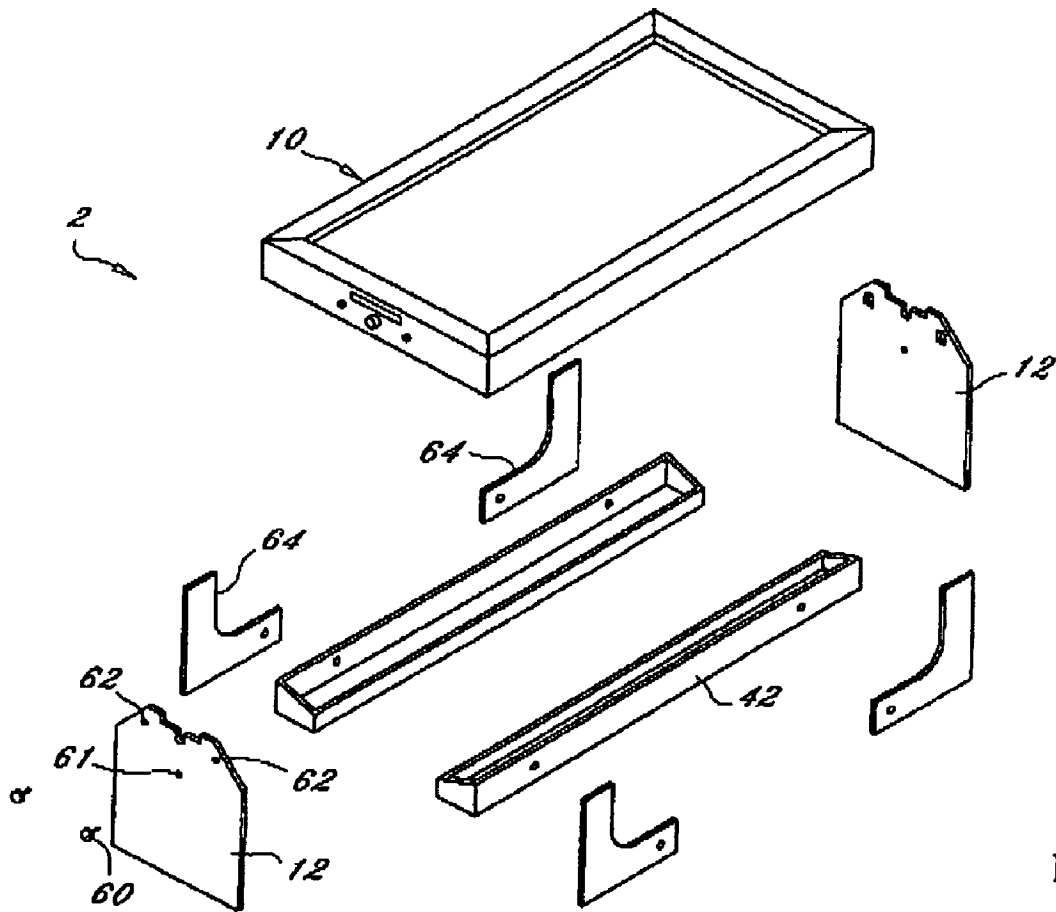


FIG. 8



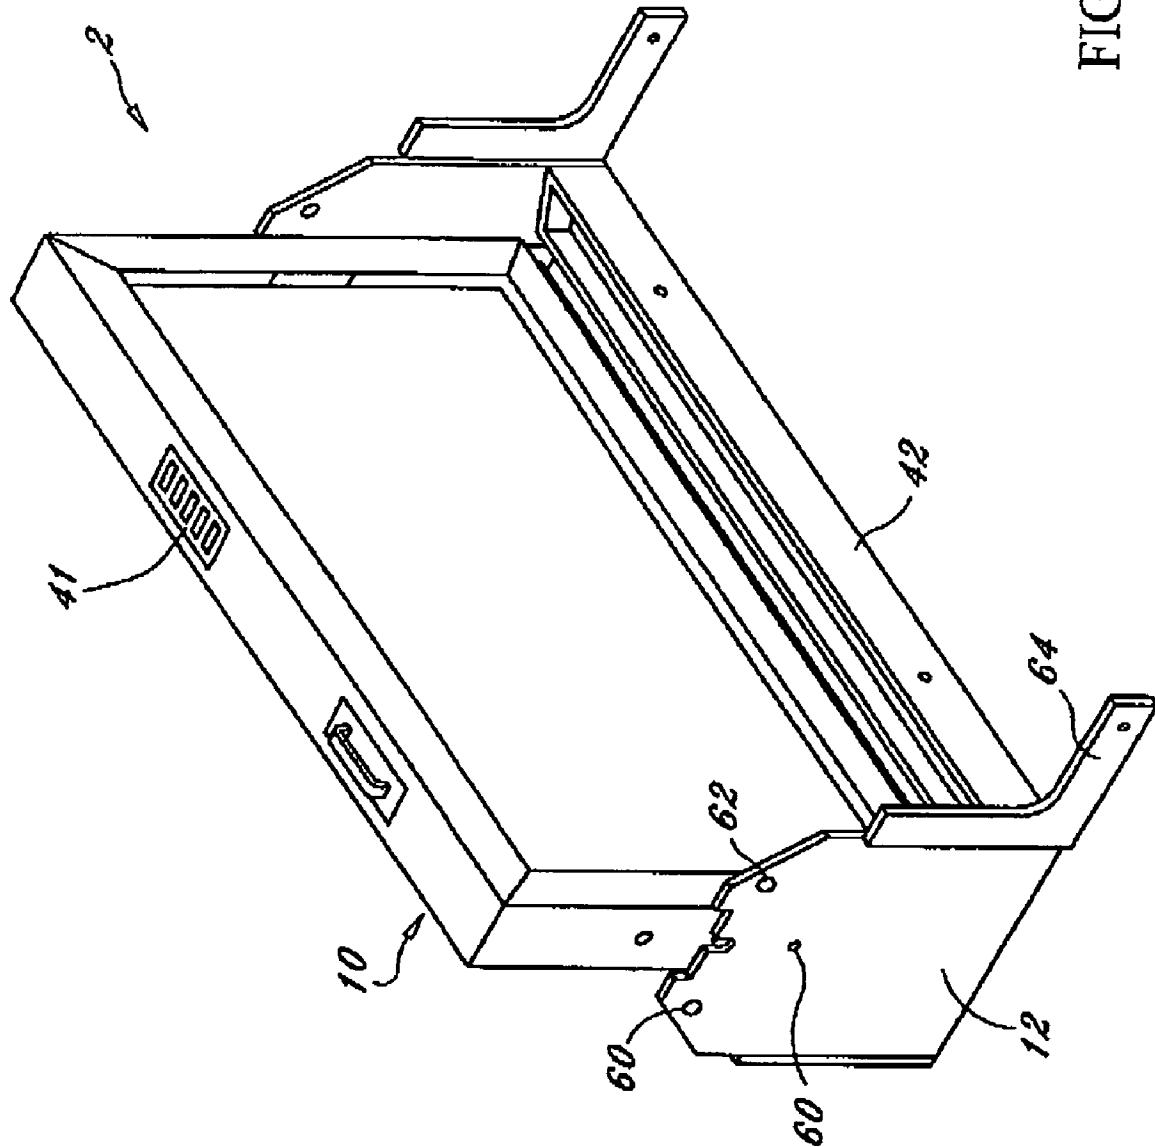


FIG. 9

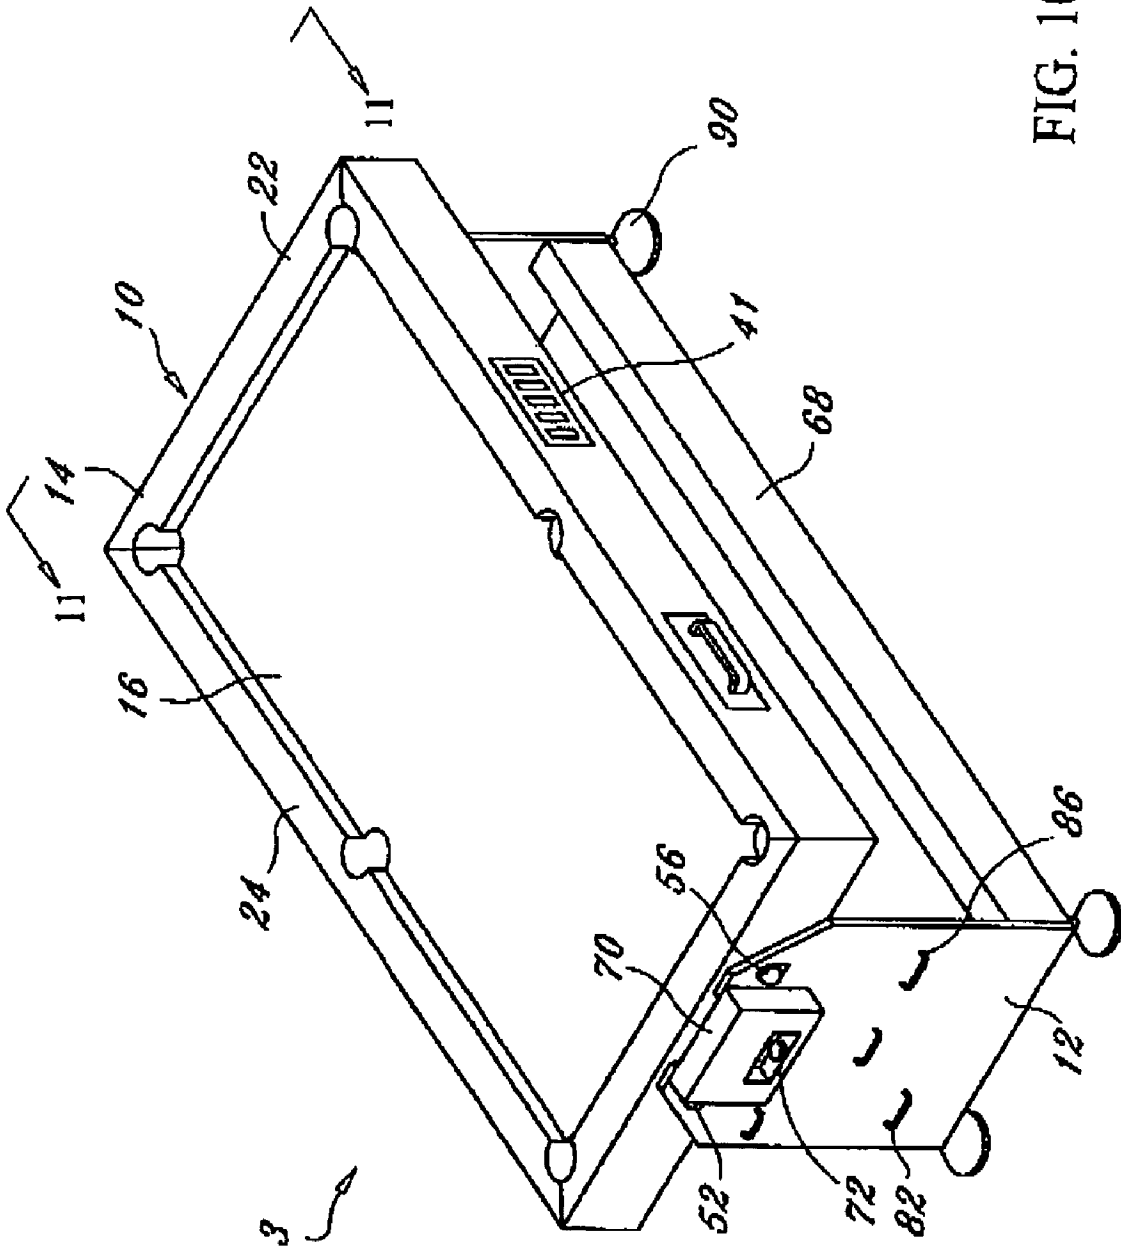


FIG. 10

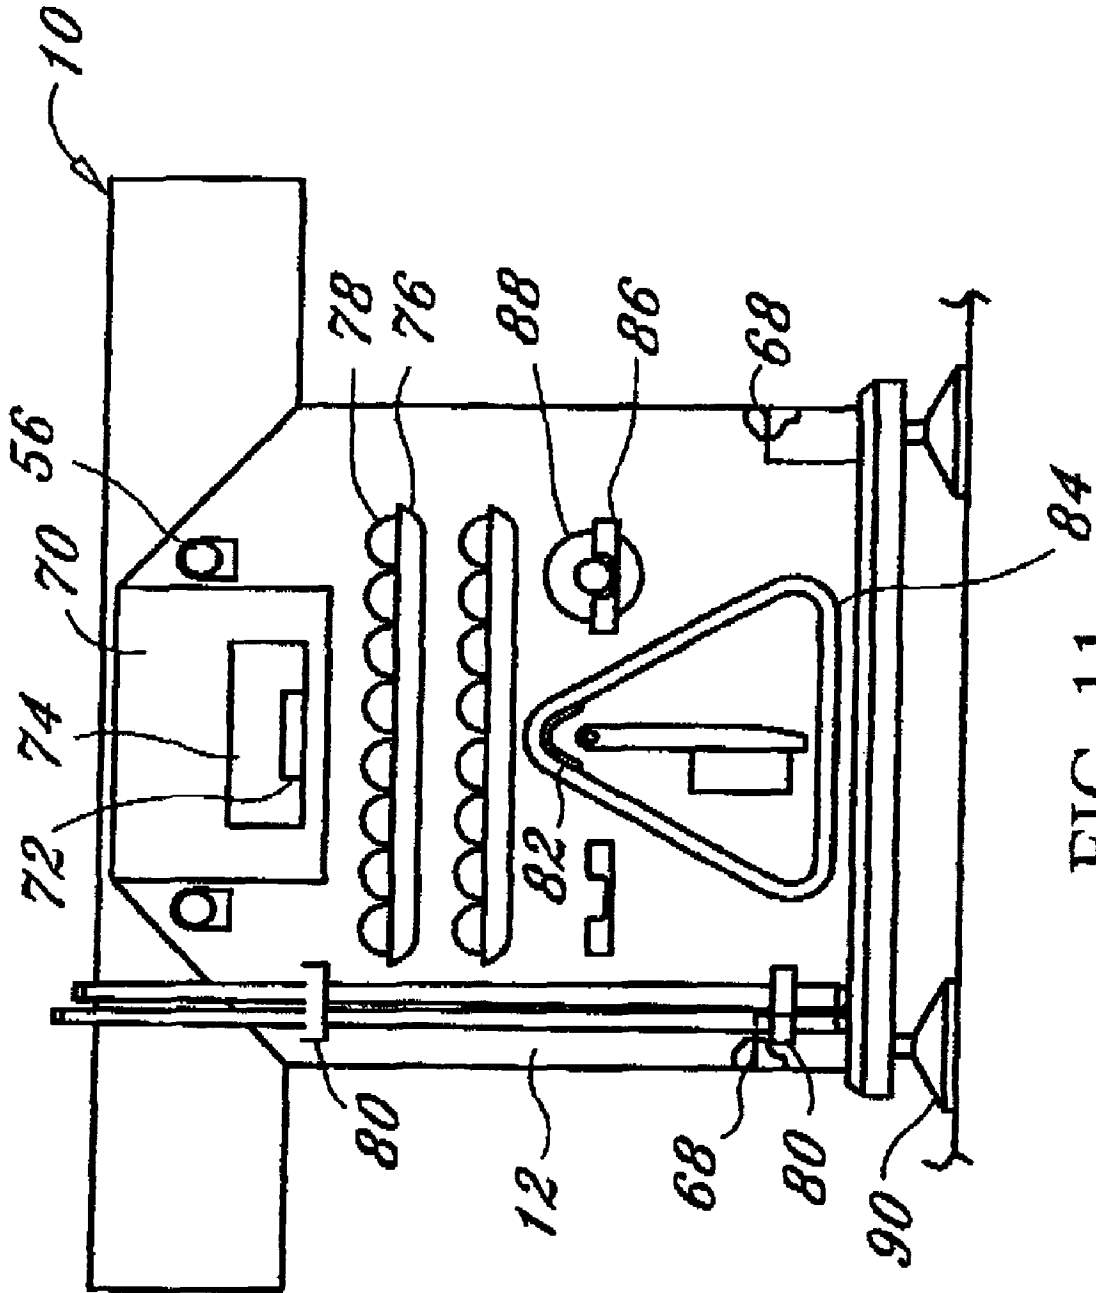


FIG. 11



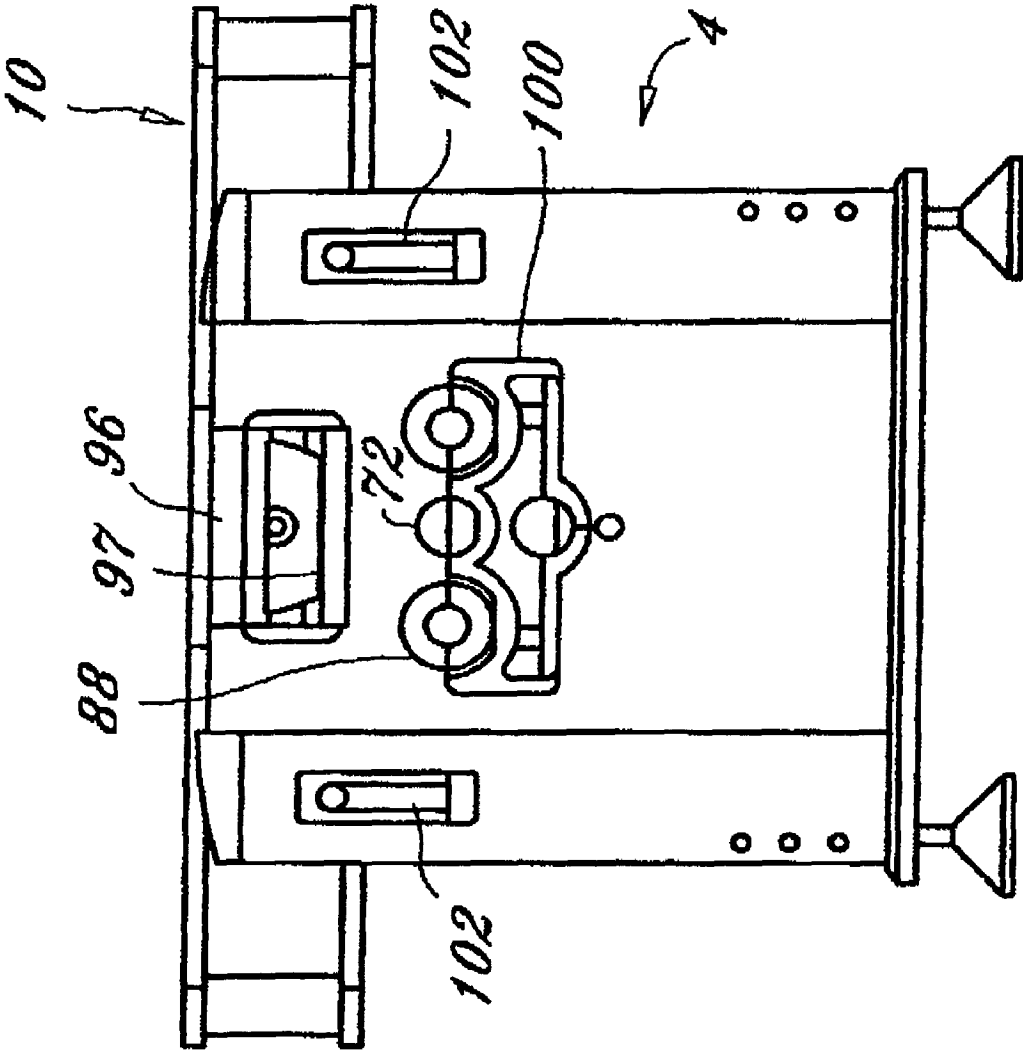


FIG. 13

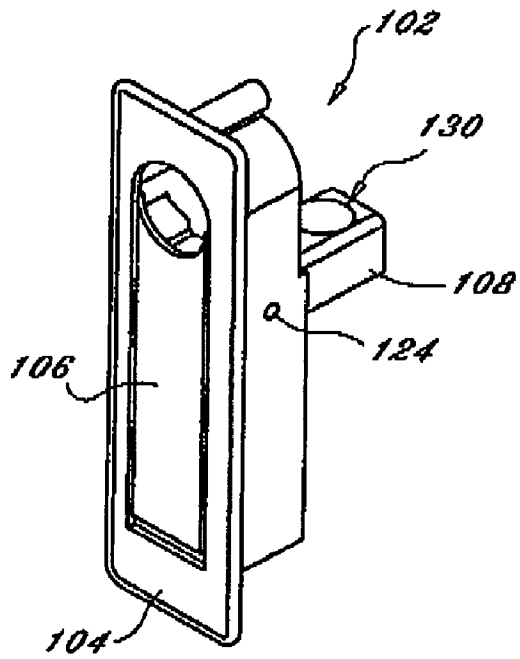


FIG. 14

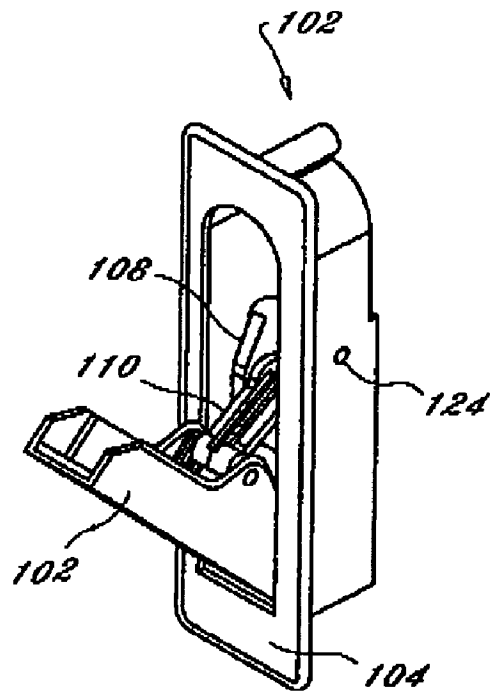


FIG. 15

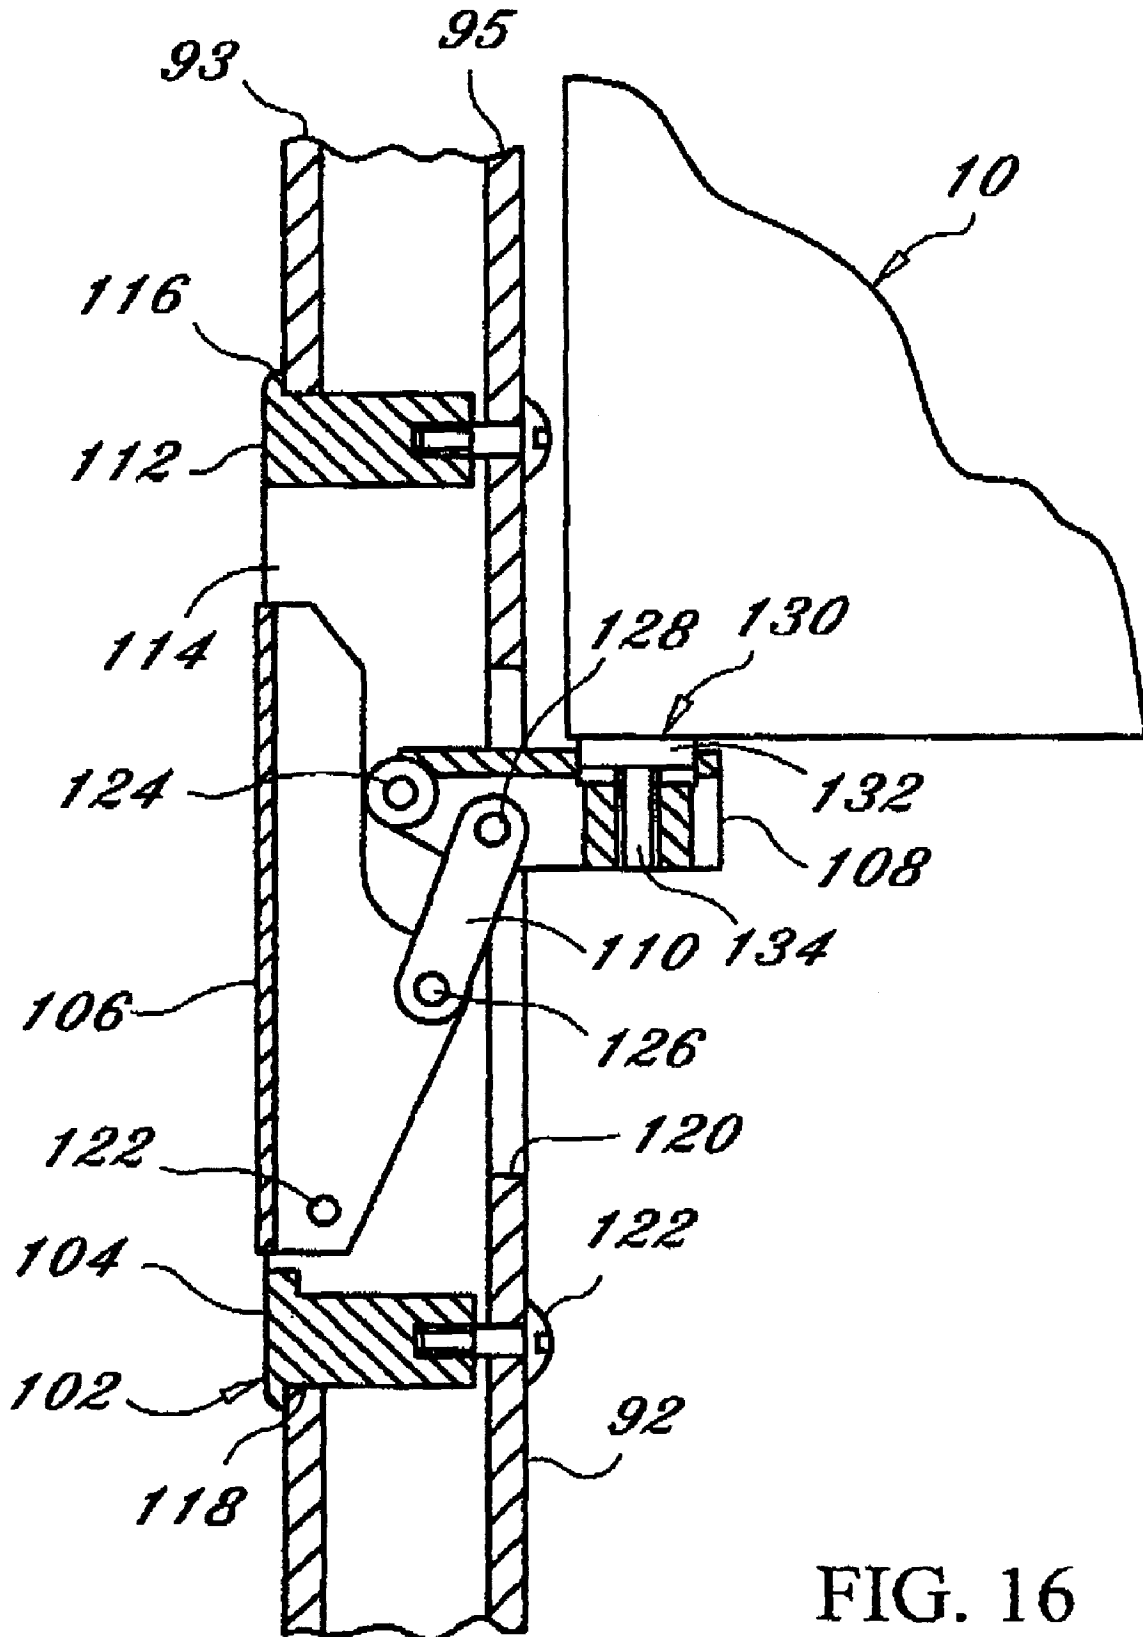


FIG. 16

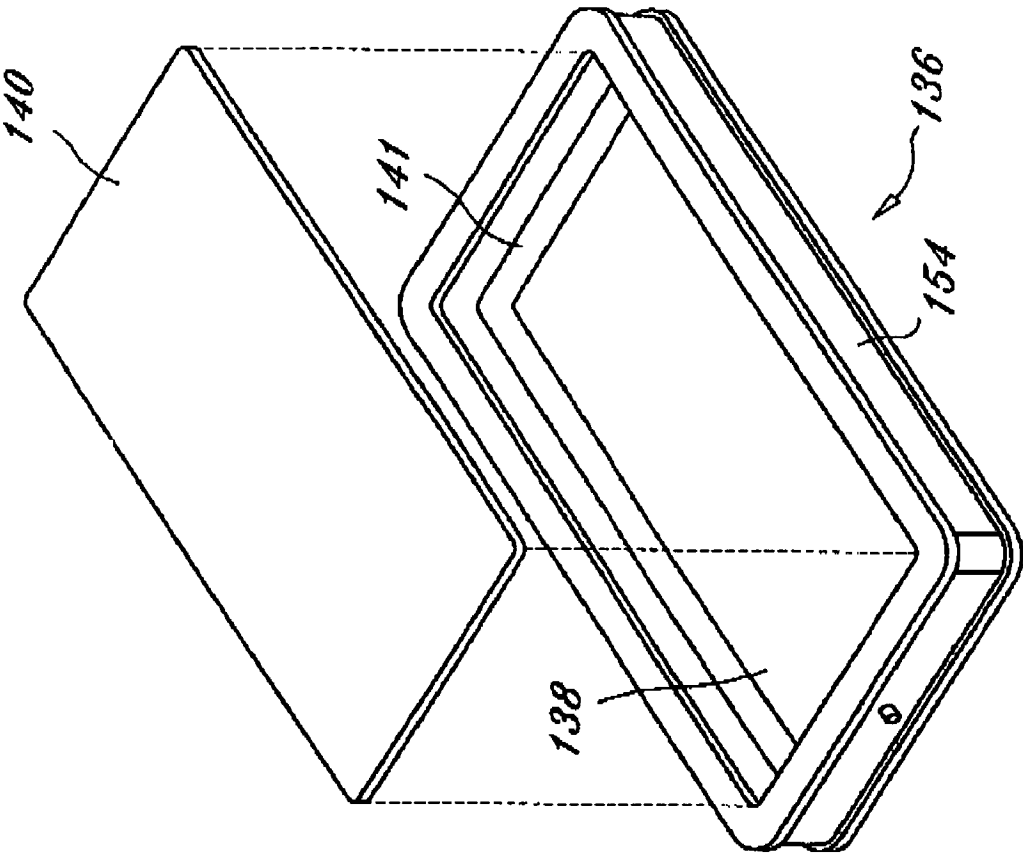


FIG. 17



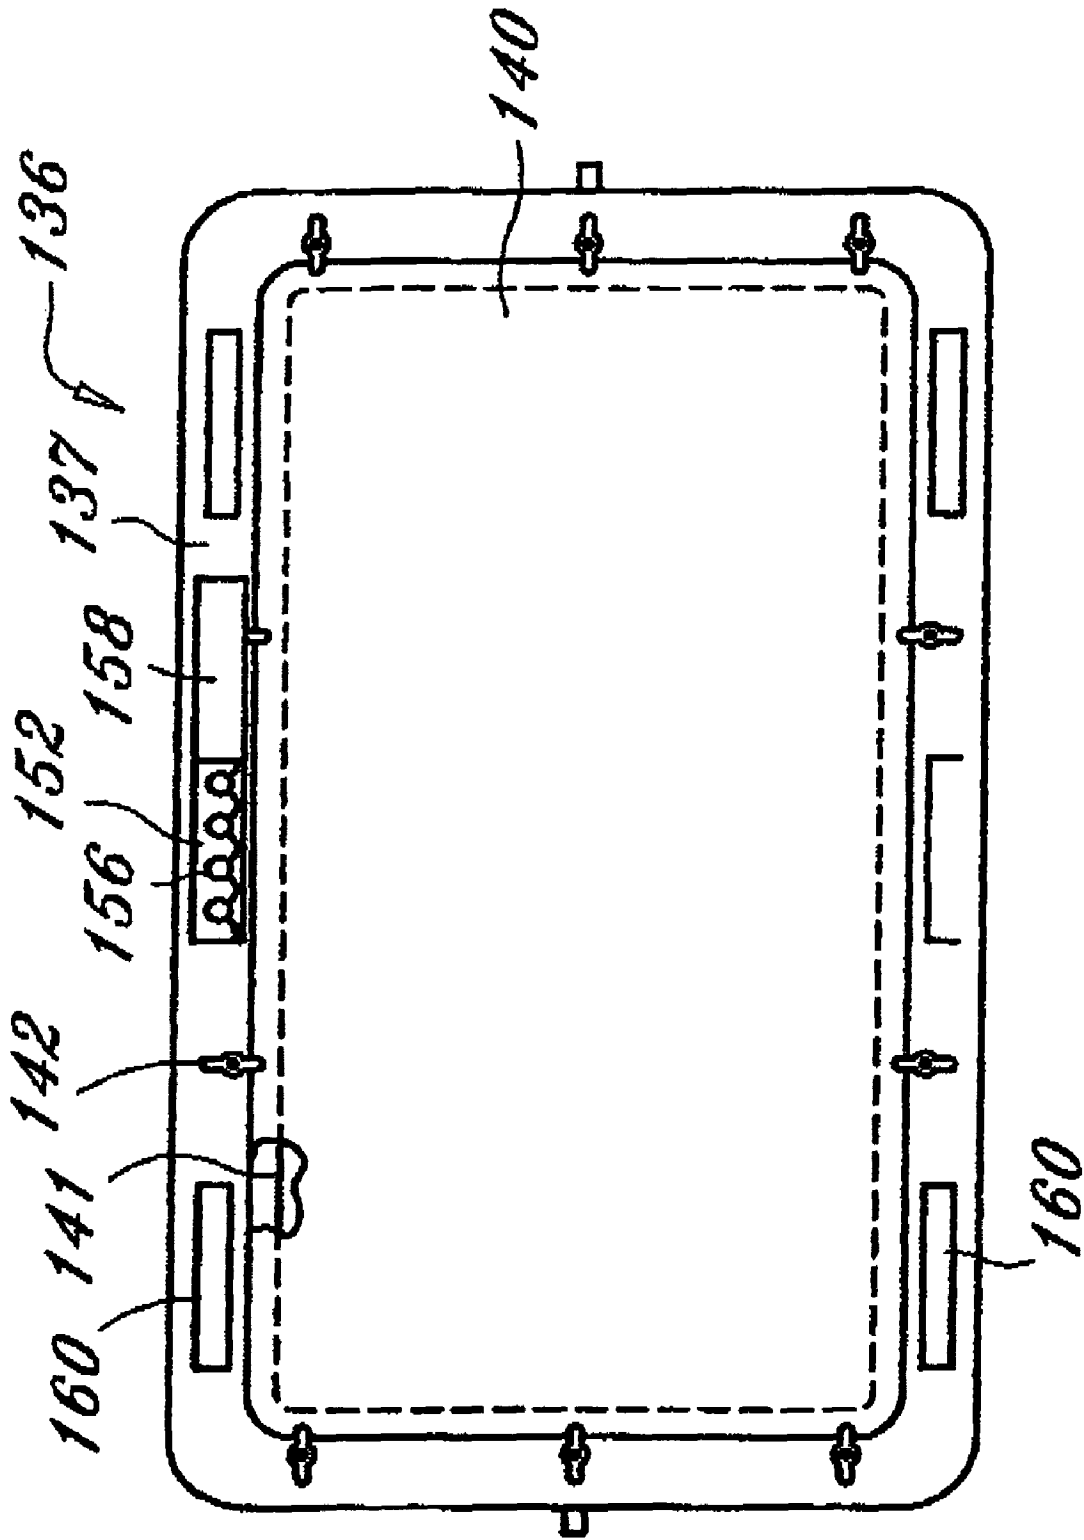


FIG. 18

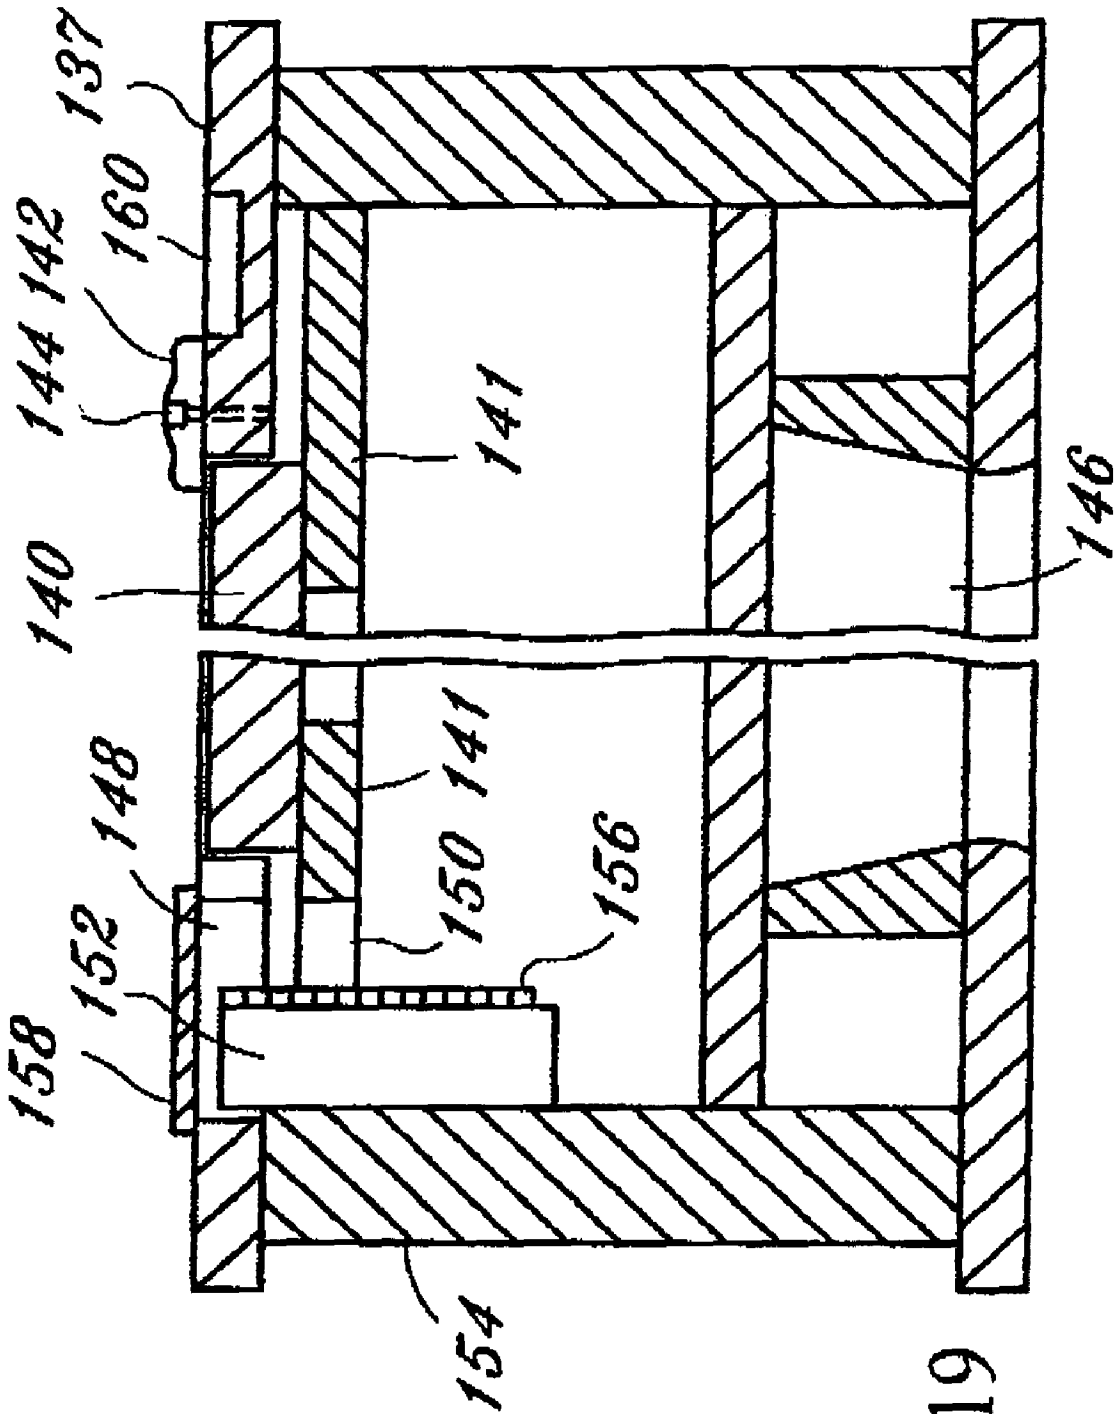


FIG. 19

**ROTARY GAME TABLE****CROSS-REFERENCES TO RELATED APPLICATIONS**

This is a continuation-in-part application taking priority from Ser. No. 10/337,623, filed on Jan. 7, 2003 now U.S. Pat. No. 6,764,409.

**BACKGROUND OF THE INVENTION****1. Field of the Invention**

The present invention relates generally to game tables and more specifically to a rotary game table, which provides two of the following, a full size pool table, an air powered hockey table or a gaming table by rotation of a combination game table.

**2. Discussion of the Prior Art**

It appears that the prior art does not disclose a combination full size pool table and air powered hockey table in one rotatable structure. U.S. Pat. No. 4,305,581 to Neuharth discloses a pivotable playing table. A billiard table is pivotally supported by two pedestals in either a horizontal or vertical orientation. U.S. Pat. No. 6,155,564 to Tsai discloses an air system structure of rotary game table. A double sided game surface is pivotally retained in a game table base. The double sided game surface includes table soccer on one surface and an air powered hockey table on the opposite surface. U.S. Pat. No. 6,347,797 discloses a game table with using modes convertible by way of rotation. A table body is pivotally retained in a table frame. The table body includes, in one embodiment, table soccer on one surface and a pool table on the opposite surface.

Accordingly, there is a clearly felt need in the art for a rotary game table, which provides two of the following, a full size pool table, an air powered hockey table or a gaming table by rotation of a combination game table and manipulation of a securing device.

**SUMMARY OF THE INVENTION**

The present invention provides a rotary game that is rotated to provide two of the following, a full size pool table, an air powered hockey table or a gaming table. A rotary game table includes a combination game table two side support members and at least one cross member. The combination game table includes a full size pool table surface formed on one side of the combination game table and an air powered hockey table surface formed on the opposite side. The size of the pool table surface is the same as a regulation size pool table. A plurality of pool ball pockets are formed in the pool table surface that are sized to receive normal sized pool balls. A net is preferably used to capture a billiard ball that falls into one of the pool ball pockets. However, other devices may be used to capture a billiard ball that falls into a pool ball pocket, such as a plastic molded pocket.

The air powered hockey table surface includes a plurality of air holes formed through the table surface. A diffuser plate is disposed below the air powered hockey table surface. An air blower is preferably retained in a sliding drawer between the pool table surface and the diffuser plate. An air hole is formed through the diffuser plate to receive an output of the air blower. The air blower draws air from inside the combination game table and pushes the air through the plurality of air holes. A puck slot is disposed on each end of the air powered hockey table to provide scoring in a game of air powered hockey.

Preferably, at least one accessory retainer is terminated on each end with a single side support member. The at least one cross member is also terminated on each end by a single side support member. The combination game table is pivotally retained by a single side support member on each end thereof. At least one locking pin device is disposed in each side support member. Each locking pin device is preferably spring loaded such that a spring pin is in a normally extended position. At least one pin cavity is formed in each end of the combination game table to receive the at least one locking pin. The at least one locking pin is withdrawn from the at least one pin cavity to allow the game table to be rotated. A separate locking pin may also be used that is withdrawn from each side support member.

A second embodiment of a rotary game table includes a combination game table, two side support members, at least two pivotal support arms and at least one cross member. The combination game table is the same as in the first embodiment. Preferably, at least one accessory retainer acts as the at least one cross member. The at least one accessory retainer is terminated on each end with a single side support member. The combination game table is pivotally retained by one side support member on each end thereof. Each pivotal support arm is pivotally attached to one end of one side support member. The pivotal support arms are swung such that they are parallel with the side support members when rotating the combination game table. Each pivotal support arm is attachable to a single accessory retainer with any suitable quick release fastener. The at least one locking pin device may also be disposed in each side support member.

A third embodiment of a rotary game table includes a combination game table, two side support members, and at least one cross member. The combination game table is the same as in the first embodiment. The at least one cross member is terminated on each end with a single side support member. The combination game table is pivotally retained by one side support member on each end thereof. At least one locking pin device is disposed in each side support member.

A pivotal support arm may be substituted for the at least one locking pin device. Each pivotal support arm would be pivotally attached to one end of one side support member. The pivotal support arms are swung such that they are parallel with the side support members when rotating the combination game table. Each pivotal support arm is attachable to a single cross member with any suitable quick release fastener.

At least one of the two side support members is preferably configured to retain game accessories such as a plurality of billiard balls, cue sticks, a rack, a puck, and two hockey paddles. A plurality of game accessories is defined by at least two billiard balls.

A fourth embodiment of a rotary game table includes a combination game table, two side support members, and at least one cross member. The combination game table is the same as in the first embodiment. The at least one cross member is terminated on each end with a single side support member. The combination game table is pivotally retained by one side support member on each end thereof. Preferably, two support latches are in each side support member. One of the two side support members is preferably configured to retain game pool accessories such as a plurality of billiard balls, a rack and a brush, and the other one of the two side support member is preferably configured to retain hockey accessories such as two paddles and a puck.

A gaming table surface may be substituted for the air powered hockey table surface. The gaming table surface includes a gaming pocket formed in the combination game table and at least one gaming insert. The gaming insert is preferably

3

retained with a plurality of lock clips. A dealer chip holder and player chip holders are also formed adjacent the gaming table surface.

Accordingly, it is an object of the present invention to provide a rotary game table, which provides two of the following, a pool (billiards) table, an air powered hockey table or a gaming table in a combination game table.

These and additional objects, advantages, features and benefits of the present invention will become apparent from the following specification.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a perspective view of a rotary game table in accordance with the present invention.

FIG. 2 is a partially exploded perspective view of a rotary game table in accordance with the present invention.

FIG. 3 is a perspective view of a rotary game table with a combination game table in a vertical orientation in accordance with the present invention.

FIG. 4 is a cross sectional view of a combination game table of a rotary game table in accordance with the present invention.

FIG. 4a is a cross sectional view of an electrical cord of an air blower routed through a pivot pin of a rotary game table in accordance with the present invention.

FIG. 5 is an enlarged perspective view of a locking pin device of a rotary game table in accordance with the present invention.

FIG. 6 is an enlarged perspective view of a locking pin of a rotary game table in accordance with the present invention.

FIG. 7 is a perspective view of a second embodiment of a rotary game table in accordance with the present invention.

FIG. 8 is a partially exploded perspective view of a second embodiment of a rotary game table in accordance with the present invention.

FIG. 9 is a perspective view of a second embodiment of a rotary game table with a combination game table in a vertical orientation in accordance with the present invention.

FIG. 10 is a perspective view of a third embodiment of a rotary game table in accordance with the present invention.

FIG. 11 is a front view of a side support member not shown in FIG. 10 of a third embodiment of a rotary game table in accordance with the present invention.

FIG. 12 is a perspective view of a fourth embodiment of a rotary game table in accordance with the present invention.

FIG. 13 is a front view of a side support member not shown in FIG. 12 of a fourth embodiment of a rotary game table in accordance with the present invention.

FIG. 14 is a perspective view of a support latch in a locked orientation of a fourth embodiment of a rotary game table in accordance with the present invention.

FIG. 15 is a perspective view of a support latch in a retracted orientation of a fourth embodiment of a rotary game table in accordance with the present invention.

FIG. 16 is a cross sectional view of a support latch in a locked orientation of a fourth embodiment of a rotary game table in accordance with the present invention.

FIG. 17 is a perspective view of a combination game table with a gaming pocket on one side and a pool table surface on the other side thereof of a rotary game table in accordance with the present invention.

FIG. 18 is a top view of a combination game table with a gaming pocket on one side and a pool table surface on the other side thereof of rotary game table in accordance with the present invention.

4

FIG. 19 is an enlarged partial cross sectional view of a combination game table with a gaming pocket on one side and a pool table surface on the other side thereof of rotary game table in accordance with the present invention.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

With reference now to the drawings, and particularly to FIG. 1, there is shown a perspective view of a rotary game table 1. With reference to FIGS. 2-4, the rotary game table 1 includes a combination game table 10, two side support members 12 and at least one cross member. The combination game table 10 includes a game frame 14, a pool table surface 16, an air powered hockey surface 18 and an air blower 20. The pool table surface 16 is formed on one side of the combination game table 10 and an air powered hockey table surface 18 formed on the opposite side. The size of the pool table surface 16 has the same dimensions as a regulation pool table. The game frame 14 preferably includes two end frame members 22 and two lengthwise frame members 24. The two end frame members 22 are attached to the two lengthwise frame members 24 with any acceptable fastening process, such as glue or fasteners.

A perimeter of the pool table surface 16 is preferably attached to an inside perimeter of the game frame 14 with threaded fasteners, but other attachment methods may also be used. The air powered hockey surface 18 is preferably attached to an inside perimeter of the game frame 14 with glue, but other attachment methods may also be used. Pool ball pockets 26 are formed in the end frame members 22, the lengthwise frame members 24 and the pool table surface 16. The pool ball pockets 26 are formed substantially through a height of the end and lengthwise frame members. Preferably, a net 28 is attached to a wall of each pool ball pocket 26 to capture a billiard ball that falls therein.

The air powered hockey table surface 18 includes a plurality of air holes 30 formed therethrough. A diffuser plate 35 is disposed below the air powered hockey table surface 18 such that an air gap 37 is maintained therebetween. The air blower 20 is preferably retained in a sliding drawer 34 between the pool and air powered hockey table surfaces. As clearly shown in FIG. 4, a space or cavity 31 is between pool table surface 16 and hockey table surface 18 that has air blower 20 therein. Game table 10 includes a space or cavity 32 constructed to receive drawer 34 with air blower 20 positioned therein. Air blower 20, when drawer 34 is in the closed position as shown, is located in both spaces 31 and 32 of the combination table. Cavity 32 is the volume generally enclosed by the table surfaces 16 and 18, two end frame members 22 and two lengthwise frame members 24 as shown in FIGS. 1 and 4. Referring back to FIG. 4 an air hole 39 is formed through the diffuser plate 35 to receive an output of the air blower 20. The air blower 20 draws air from inside the combination game table 10 and preferably through at least one air vent 41 formed through the frame 14. The air output from the air blower 20 flows through the air hole 41 into the air gap 37 created by the diffuser plate 35 and through the plurality of air holes 30 in the air powered hockey table surface 18. The drawer 34 is required to allow the air blower 20 to be removed from the combination game table 10 for replacement. A puck slot 36 is formed through each end frame member 22 to enable scoring in a game of air powered hockey.

At least one cross member 38 is preferably terminated by an end cap 40 on each end thereof. The end cap 40 is attached to an end of the at least one cross member 38 and to one of the two side support members 12 with any suitable fastening

5

method. Preferably, an end of at least one accessory retainer **42** is attached to one of the side support members **12** with any suitable fastening method. Each accessory retainer **42** includes an accessory trough **44**. The accessory trough is configured to retain a plurality of game accessories such as a plurality of billiard balls, cue sticks, a rack, a puck, and two hockey paddles. With reference to FIG. **4a**, an electrical cord **49** is routed through a tubular pivot pin **46**. The pivot pin **46** extends from each end of the combination game table **10**. A pivot slot **48** is preferably formed in a top of each side support member **12**, **92** to pivotally receive the pivot pin **46**. The other pivot pin **46** does not have to be tubular, but may be solid. A puck clearance slot **50** is also formed in a top of each side support member **12**, **92**. The electrical cord **49** of the air blower **20** is preferably run through one of the pivot pins **46**.

With reference to FIG. **5**, at least one locking pin device **52** is disposed in at least one of the two side support members **12**. The locking pin device **52** includes a locking body **54** and a spring pin **56**. The spring pin **56** is retained in the locking body **54**. The spring pin **56** is spring loaded inside the locking body **54**; such that the spring pin **56** is biased in an extended position. At least one pin cavity **58** is formed in at least one end of the combination game table **10** to receive a respective spring pin **56**. The respective spring pin **56** is withdrawn from the at least one pin cavity **58** to allow the game table to be rotated for storage or to change the game surface. Spring loaded locking pins are well known in the art and need not be explained in detail. With reference to FIG. **6**, the locking pin device **52** may be replaced with a separate locking pin **60**. With reference to FIG. **8**, a pin hole **62** is formed through the side support member **12** instead of attaching the locking pin device **52**. The locking pin **60** is withdrawn from each side support member **12** to allow rotation of the combination game table **10**. To retain the combination game table **10** in a vertical orientation, a pin hole **61** is formed through at least one side support member **12**. The pin hole **61** is disposed in the side support member **12** to be concentric with the at least one pin cavity **58**. The locking pin **60** is inserted through the pin hole **61** and into the at least one pin cavity **58**.

With reference to FIGS. **7-9**, a second embodiment of a rotary game table **2** includes a combination game table **10**, two side support members **12**, at least two pivotal support arms **64** and at least one cross member. The combination game table **10** is the same as that of the rotary game table **1**. Preferably, at least one accessory retainer **42** acts as the at least one cross member. One of the two side support members **12** is attached to each end of the at least one accessory retainer **42** with any suitable fastening process. The combination game table **10** is pivotally retained by a single side support member **12** on each end thereof. Each pivotal support arm **64** is pivotally attached to one end of the side support member **12** with at least one hinge or any other suitable pivotal retention device.

To rotate the combination game table **10**, the pivotal support arms **64** are swung outward such that they are parallel with the side support members **12**. The pivotal support arms **64** are swung inward to retain the combination game table **10** in a horizontal orientation. Each pivotal support arm **64** is attachable to a single accessory retainer **42** with any suitable quick release fastener **66**. Quick release fasteners are well known in the art and need not be explained in detail. Use of the at least two pivotal support arms **64** eliminates the need for the use of locking pin devices **52** or locking pins **60**. However, the locking pin devices **52** or locking pins **60** may also be used in conjunction with the four pivotal support arms **64**.

With reference to FIGS. **10-11**, a third embodiment of a rotary game table **3** includes a combination game table **10**,

6

two side support members **12** and at least one cross member **68**. The combination game table **10** is the same as that of the rotary game table **1**. One of the two side support members **12** is attached to each end of the at least one cross member **68** with any suitable fastening process. The combination game table **10** is pivotally retained by a single side support member **12** on each end thereof.

A hockey puck housing **70** is preferably attached to the support member **12**. When a player is successful in scoring, a hockey puck **72** will fall into a puck tray **74** in the hockey puck housing **70**. At least one ball tray **76** is preferably mounted to one of the two side support members **12** to retain a plurality of billiard balls **78**. At least two pool cue racks **80** are preferably attached to at least one side support member **12**. A rack holder **82** is preferably attached to one of the two side support members **12** to retain a rack **84**. At least one paddle holder **86** preferably retains a single hockey paddle **88**. To rotate the combination game table **10**, at least one spring pin **56** of the at least one locking pin device **52** is withdrawn from the at least one pin cavity **58** to allow the game table to be rotated for storage or to change the game surface.

At least one locking pin **60** may be substituted for the at least one locking pin device **52**. Further, the at least two pivotal support arms **64** of the second embodiment may also be substituted for the at least one locking pin device **52**. Each pivotal support arm **64** would be pivotally attached to a single side support member **12** with at least one hinge or any other suitable pivotal retention device. Each pivotal support arm **64** would be attached to a single cross member **68** with any suitable quick release fastener **66**. Quick release fasteners are well known in the art and need not be explained in detail. Four height adjustable feet **90** are preferably used to level the rotary game table **3**. The four height adjustable feet **90** may also be used on the rotary game table **1**, **2**.

With reference to FIGS. **12-13**, a fourth embodiment of a rotary game table **4** includes a combination game table **10**, two side support members **92** and at least one cross member **94**. The combination game table **10** is the same as that of the rotary game table **1**. One of the two side support members **92** is attached to each end of the at least one cross member **94** with any suitable fastening process. The combination game table **10** is pivotally retained by a single side support member **92** on each end thereof.

A hockey puck housing **96** is preferably attached to each side support member **92**. When a player is successful in scoring, the hockey puck **72** will fall into a puck tray **97** in the hockey puck housing **96**, disposed on each side support member **92**. At least one ball tray **98** is preferably mounted to one of the two side support members **92** to retain a plurality of billiard balls **78**. A rack holder **82** is preferably attached to one of the two side support members **12** to retain a rack **84**. A paddle/puck holder **100** preferably retains the hockey puck **72** and two hockey paddles **88**. Four height adjustable feet **90** are preferably used to level the rotary game table **4**.

With reference to FIGS. **14-16**, a pair of support latches **102** are retained in at least one of the two side support members **92** with any suitable fastening method. The support latch **102** includes a latch frame **104**, a latch lever **106**, a support link **108** and a latch link **110**. The latch frame **104** includes a lever housing **112** with a substantially rectangular opening **114** formed therethrough. A flange **116** is preferably formed on a front periphery of the lever housing **112**. The side support member **92** is shown as having a first wall **93** and a second wall **95**. However, the side support member **92** may also be solid, or partially hollow and partially solid.

A first latch opening **118** is formed through the first wall **93** to receive the outer periphery of the lever housing **112**. A

7

second latch opening **120** is formed through the second wall **95** to provide clearance for the movement of the support link **108**. The latch lever **102** is preferably retained in the side support member **92** with at least two fasteners **122**. The substantially rectangular opening **114** is sized to receive the latch lever **106**. The latch lever **106** is pivotally retained by the latch frame **104** with a lever pin **122** or the like. The support link **108** is pivotally retained by the latch frame **104** with a support pin **124** or the like, adjacent the latch lever **106**. One end of the latch link **110** is pivotally retained by the lever **106** with a first link pin **126** and the other end of the latch link **110** is pivotally retained by the support link **108** with a second link pin **128** or the like. FIG. **14** shows the support latch **102** in a locked position and FIG. **15** shows the support latch **102** in a retracted position.

A slack adjuster **130** extends from a top of each support link **108**. The slack adjuster ensures that the combination game table **10** does not rock or wobble, when both support latches **102** are in a locked position. The support link **108** is in a support position, when the support latch is in a locked position and the support link **108** is in a retracted position, when the support latch is in a retracted position. The slack adjuster **130** preferably includes a contact base **132** and a threaded rod **134** extending from a bottom of the contact base **132**. The contact base **132** is preferably fabricated from a resilient material to prevent damage to the combination game table **10**. A threaded hole is formed in the support link **108** to threadably receive the threaded rod **134**. The slack adjuster **130** is rotated upward to prevent the combination game table **10** from pivoting relative to the two side support members **92**. The combination game table **10** is rotated by retracting the two support latches **102** in at least one side support member **92**. After the combination game table **10** is rotated to the opposite game surface, the support latches **102** are locked.

To retain the combination game table **10** in a vertical orientation, a pin hole would be formed through at least one side support member **92**, similar to the pin hole **61** shown in FIG. **7**. The at least one pin cavity **58** would be formed in the combination game table **10** as shown in FIG. **2**, concentric with the pin hole **61**. The locking pin **60** is inserted through the pin hole **61** and into the at least one pin cavity **58** to retain the game table **10** in a vertical orientation.

With reference to FIGS. **17-19**, one side of a combination game table **136** includes a gaming pocket **138** that is sized to receive a gaming insert **140**. The combination game table **136** may be substituted for the combination game table **10** in any of the preferred embodiments 1-4. The gaming pocket **138** is formed through a gaming plate **137**. The gaming insert **140** may be a roulette table, a black jack table, a craps table or any other appropriate gambling table. A support rim **141** preferably supports the gaming insert **140** and acts as a bottom of the gaming pocket **138**. A plurality of lock clips **142** are used to retain the gaming insert **140** in the gaming pocket **138**. Each lock clip **142** is preferably retained with a screw **144**. One end of each lock clip **142** is twisted over the gaming insert **140** to lock thereof in the gaming pocket **138**. The lock clip **142** is twisted **90** degrees to allow removal of the gaming insert **140** from the gaming pocket **138**. A pool table surface **146** is preferably formed on the opposite surface of the rotary game table **136**, but other game surfaces may also be formed thereupon, such as an air hockey surface.

A plate opening **148** is formed through the gaming plate **137** and a rim opening **150** is formed through the support rim **141** to provide clearance for a dealer chip holder **152**. The plate and rim openings provide enough clearance for a dealer to insert their finger therethrough to retrieve chips from the dealer chip holder **152**. The dealer chip holder **152** is attached

8

to a side frame member **154** with any suitable attachment method. The dealer chip holder **152** retains a plurality of chips **156**. Chip holders are well known in the art and need not be explained in detail. A chip cover **158** is preferably removably attached to a top of the plate opening **148** with any suitable method. A plurality of chip pockets **160** are formed in the gaming plate **137** to receive an individual player's chips.

While particular embodiments of the invention have been shown and described, it will be obvious to those skilled in the art that changes and modifications may be made without departing from the invention in its broader aspects, and therefore, the aim in the appended claims is to cover all such changes and modifications as fall within the true spirit and scope of the invention.

I claim:

1. A rotary game table comprising:

a combination game table including a pool table disposed on one side and an air powered hockey table disposed on the other side thereof, said combination game table including two end frame members and two lengthwise frame members, a space being defined between said pool table and said air powered hockey table, at least one air opening being formed through at least one of said frame members of said combination game table, said at least one air opening communicating with said space; at least one air blower being retained within said space; two side support members;

at least one cross member being terminated by one of said two side support members on each end thereof, said combination game table being pivotally supported on each end by one of said two side support members; and a pair of support latches being contained in at least one of said two side support members, said pair of support latches preventing said combination game table from rotating.

2. The rotary game table of claim 1, further comprising: said air blower being retained in a drawer, said drawer being slidably retained in said combination game table.

3. The rotary game table of claim 1, further comprising: each one of said pair of support latches including a latch lever and a support link, said support latch being in a locked position when said support link is a support position, said support latch being in a retracted position when said support link is in a retracted position.

4. The rotary game table of claim 1, further comprising: at least one of said two side support members being configured to retain a plurality of game accessories.

5. The rotary game table of claim 2, further comprising: at least one tubular pivot pin extending outward from both ends of said combination game table, each one of said at least one tubular pivot pin being pivotally supported by one of said two side support members, an electrical cord of said air blower being routed through one of said at least one tubular pivot pin.

6. A rotary game table comprising: a combination game table including a pool table disposed on one side and an air powered hockey table disposed on the other side thereof; two side support members;

at least one cross member being terminated by one of said two side support members on each end thereof, said combination game table including at least one tubular pivot pin extending from both ends thereof, each one of said at least one tubular pivot pin being pivotally supported by one of said two side support members, an electrical cord of an air blower being routed through said at least one tubular pivot pin; and

a pair of support latches being contained in at least one of said two side support members, said pair of support latches preventing said combination game table from rotating.

7. The rotary game table of claim 6, further comprising: each one of said pair of support latches including a latch lever and a support link, said support latch being in a locked position when said support link is a support position, said support latch being in a retracted position when said support link is in a retracted position.

8. The rotary game table of claim 6, further comprising: at least one of said two side support members being configured to retain a plurality of game accessories.

9. The rotary game table of claim 6, further comprising: said air blower being retained in a drawer, said drawer being slidably retained in said combination game table.

10. The rotary game table of claim 6, further comprising: said combination game table including two end frame members and two lengthwise frame members, a space being defined between said pool table and said air powered hockey table, at least one air opening being formed through at least one of said frame members of said combination game table, said at least one air opening communicating with said space.

11. A rotary game table comprising: a combination game table including a pool table disposed on one side and an air powered hockey table disposed on the other side thereof, said combination game table being pivotally supported on each end by one of two side support members;

at least one cross member being terminated by one of said two side support members on each end thereof; an air blower being retained in a drawer, said drawer being slidably retained in said combination game table; and means for securing said combination game table such that it does not pivot relative to said two side support members.

12. The rotary game table of claim 11, further comprising: said at least one cross member being at least one accessory retainer.

13. The rotary game table of claim 11, further comprising: at least one tubular pivot pin extending outward from both ends of said combination game table, each one of said at least one tubular pivot pin being pivotally supported by one of said two side support members, an electrical cord of said air blower being routed through one of said at least one tubular pivot pins.

14. The rotary game table of claim 11, further comprising: said means for securing said combination game table being at least one locking pin device retained in at least one of said two side support members, at least one pin cavity being formed in at least one end of said combination game table.

15. The rotary game table of claim 11, further comprising: said means for securing said combination game table being at least two pivotal support arms, one of said two pivotal support arms being pivotally attached to an end of one of said two side support members, said at least two pivotal support arms being swung outward to allow said combination game table to be rotated, said at least two pivotal support arms being secured to one of said at least one cross member to retain said combination game table in a horizontal orientation.

16. The rotary game table of claim 11, further comprising: at least one of said two side support members being configured to retain a plurality of game accessories.

17. The rotary game table of claim 11, further comprising: said combination game table including two end frame members and two lengthwise frame members, a space being defined between said pool table and said air powered hockey table, at least one air opening being formed through at least one of said frame members of said combination game table, said at least one air opening communicating with said space.

18. A rotary game table comprising: a combination game table including a pool table disposed on one side and a gaming table disposed on the other side thereof with a cavity formed therebetween, the cavity constructed to receive an air blower therein; two side support members;

at least one cross member being terminated by one of said two side support members on each end thereof, said combination game table being pivotally supported on each end by one of said two side support members; and means for securing said combination game table such that it does not pivot relative to said two side support members.

19. The rotary game table of claim 18, further comprising: said means for securing said combination game table being a pair of support latches, said pair of support latches being contained in at least one of said two side support members, said pair of support latches preventing said combination game table from rotating.

20. The rotary game table of claim 18, further comprising: the air blower being retained in a drawer, said drawer being slidably retained in said combination game table.

21. The rotary game table of claim 18, further comprising: said gaming table including a gaming pocket and at least one gaming insert, said gaming pocket being sized to receive said at least one gaming insert.

22. The rotary game table of claim 18, further comprising: said gaming table including a dealer chip holder and a plurality of chip pockets.

23. The rotary game table of claim 18, further comprising: at least one of said two side support members being configured to retain a plurality of game accessories.

24. The rotary game table of claim 18, further comprising: at least one tubular pivot pin extending outward from both ends of said combination game table, each one of said at least one tubular pivot pin being pivotally supported by one of said two side support members, an electrical cord of said air blower being routed through one of said at least one tubular pivot pin.

25. A rotary game table comprising: a combination game table including a pool table disposed on one side and an air powered hockey table disposed on the other side thereof, said combination game table being pivotally supported on each end by one of two side support members, said combination game table including two end frame members and two lengthwise frame members, a space being defined between said pool table and said air powered hockey table, at least one air opening being formed through at least one of said frame members of said combination game table, said at least one air opening communicating with said space;

at least one cross member being terminated by one of said two side support members on each end thereof; an air blower being retained in a drawer, said drawer being slidably retained in said combination game table; and means for securing said combination game table such that it does not pivot relative to said two side support members.

11

26. The rotary game table of claim 25, further comprising:  
at least one tubular pivot pin extending outward from both  
ends of said combination game table, each one of said at  
least one tubular pivot pin being pivotally supported by  
one of said two side support members, an electrical cord 5  
of said air blower being routed through one of said at  
least one tubular pivot pin.

27. A rotary game table comprising:  
a combination game table including a pool table disposed  
on one side and an air powered hockey table disposed on 10  
the other side thereof;  
two side support members;  
at least one cross member being terminated by one of said  
two side support members on each end thereof, said

12

combination game table being pivotally supported on  
each end by one of said two side support members; and  
a pair of support latches being contained in at least one of  
said two side support members, each one of said pair of  
support latches including a slack adjuster extending  
from a support link, said pair of support latches prevent-  
ing said combination game table from rotating, each one  
of said pair of support latches including a latch lever and  
said support link, said support latch being in a locked  
position when said support link is a support position,  
said support latch being in a retracted position when said  
support link is in a retracted position.

\* \* \* \* \*